

MT-AT

ELESA Original design

Crank handles with revolving handle





- **Material**
Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.
- **Colour**
Black, matte finish.
- **Assembly**
H9 reamed black-oxide steel boss.
- **Revolving handle**
Type I.621 in technopolymer, non-dismountable.

Features and applications

The reticular structure of the crank arm and the technopolymer used make this handle very strong and therefore suitable for transmitting high torque values.

Special executions on request (For sufficient quantities)
Threaded brass boss.

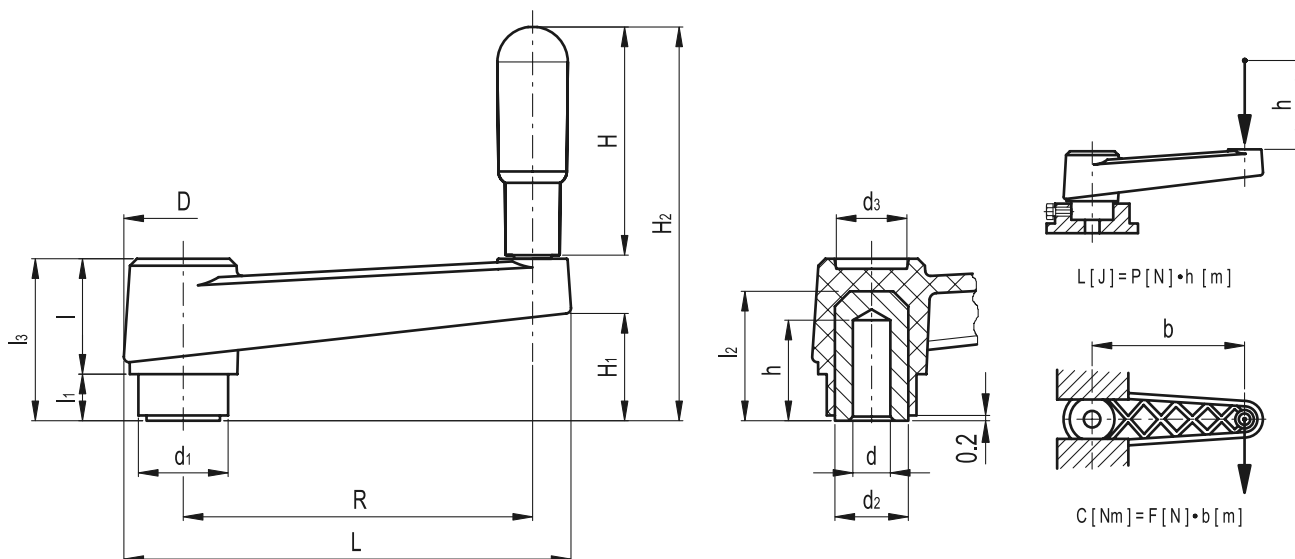

$$L [J] = P [N] \cdot h [m]$$

$$C [Nm] = F [N] \cdot b [m]$$

Standard Elements		Main dimensions											Mounting hole		Handle	C #	L #	△△	
Code	Description	R	L	D	d ₁	d ₃	l	l ₁	l ₃	d ₂	l ₂	H ₁	H ₂	d H9	h	H	[Nm]	[J]	g
44053	MT.50-AT	50	69	22.5	18	13	20.5	9	29.5	15	23	18.5	66	6	18	35	80	7	55
44113	MT.64-AT	64	86	26.5	20	16	22.5	9	31.5	15	25	17.5	78	8	20	45	120	11	82
44213	MT.80-AT	80	106	30	24	17	26	11	37	18	31	23.5	99	10	25	60	200	15	118
44313	MT.100-AT	100	128	33.5	24	21	30.5	10	40.5	18	31	25	106	12	24	65	210	27	190
44413	MT.130-AT	130	162	39	34	25	35	14	49	26	43	32.5	113	14	30	65	350	45	335
44513	MT.160-AT	160	197	44	34.5	27	39.5	15	54.5	26	43	36	136	16	30	80	470	55	375

See Technical Data (page A8) for maximum applicable torque (C) and impact strength (L).