


# DIN 6335



## Star knobs

- **Material**
  - **cast aluminium** with matte finish (type MT)
  - **cast aluminium** with deburred and mirror polished finish (type PL).
- **Assembly**
  - Execution **C**: hub, H7 reamed blind hole.
  - Execution **D**: hub, tapped through hole.
  - Execution **E**: hub, tapped blind hole.

**Special execution on request** (For sufficient quantities)  
- Hub not drilled (execution A).

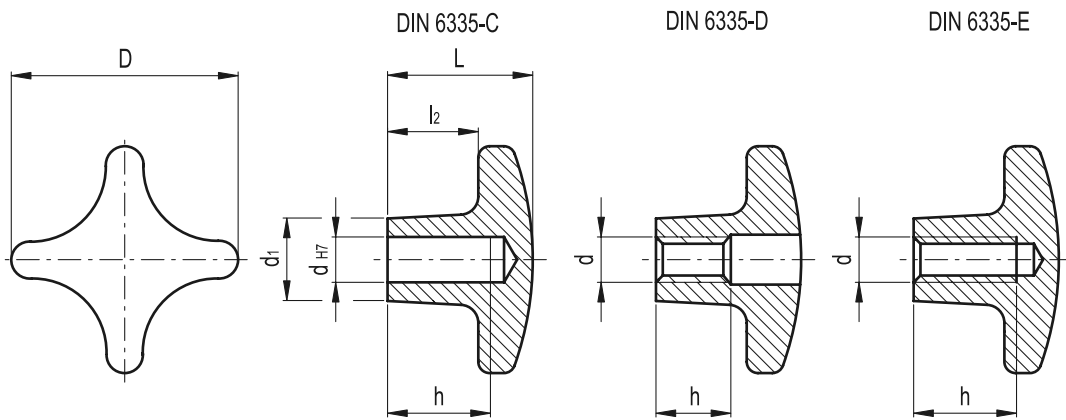

Standard Elements	Main dimensions				Mounting hole			⚖
	Description	D	L +1	d1	l2	d H7	d 6H	
DIN 6335-AL-40-B8-C*	40	25	14	14	8	-	15	22
DIN 6335-AL-40-M8-D*	40	25	14	14	-	M8	13	23
DIN 6335-AL-40-M8-E*	40	25	14	14	-	M8	15	20
DIN 6335-AL-50-B10-C*	50	32	18	20	10	-	18	44
DIN 6335-AL-50-M10-D*	50	32	18	20	-	M10	16	44
DIN 6335-AL-50-M10-E*	50	32	18	20	-	M10	18	46
DIN 6335-AL-63-B12-C*	63	40	20	25	12	-	22	76
DIN 6335-AL-63-M12-D*	63	40	20	25	-	M12	20	70
DIN 6335-AL-63-M12-E*	63	40	20	25	-	M12	22	75
DIN 6335-AL-80-B16-C*	80	50	25	30	16	-	28	140
DIN 6335-AL-80-M16-D*	80	50	25	30	-	M16	20	135
DIN 6335-AL-80-M16-E*	80	50	25	30	-	M16	28	145

\* Complete the description of the standard item needed by adding the index of the finish: MT (matte) or PL (polished).