

# DIN 6335

## Star knobs

### • Material


Nodular cast iron.

### • Assembly

- Execution **B**: hub, H7 reamed through hole.
- Execution **C**: hub, H7 reamed blind hole.
- Execution **D**: hub, tapped through hole.
- Execution **E**: hub, tapped blind hole.

### Special execution on request (For sufficient quantities)

- Hub not drilled (execution A).

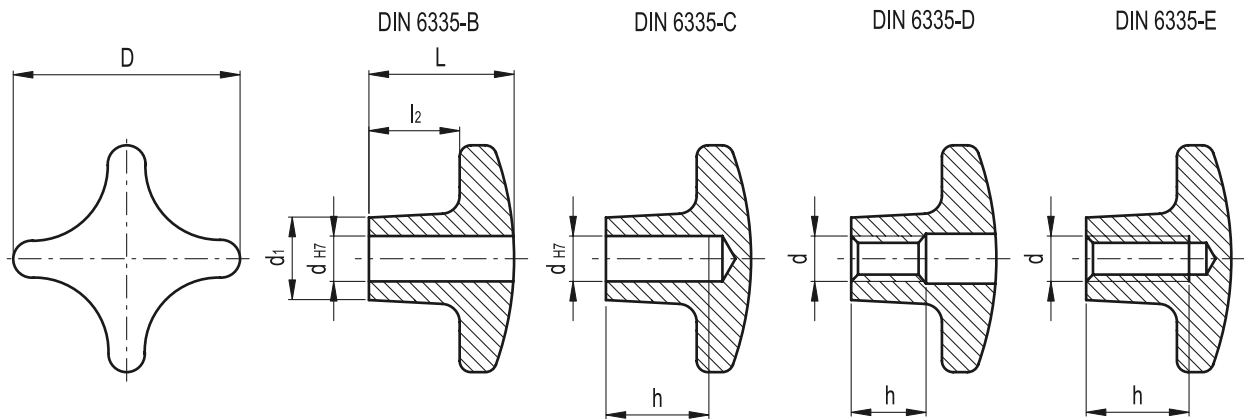

Standard Elements	Main dimensions				Mounting hole			$\triangle$
Description	D	L +1	d <sub>1</sub>	l <sub>2</sub>	d <sub>H7</sub>	d	h	g
DIN 6335-GG-32-B6-B	32	20	12	10	6	-	-	31
DIN 6335-GG-32-B6-C	32	20	12	10	6	-	12	29
DIN 6335-GG-32-M6-D	32	20	12	10	-	M6	10	28
DIN 6335-GG-32-M6-E	32	20	12	10	-	M6	12	30
DIN 6335-GG-40-B8-B	40	25	14	14	8	-	-	47
DIN 6335-GG-40-B8-C	40	25	14	14	8	-	15	49
DIN 6335-GG-40-M8-D	40	25	14	14	-	M8	13	60
DIN 6335-GG-40-M8-E	40	25	14	14	-	M8	15	60
DIN 6335-GG-50-B10-B	50	32	18	20	10	-	-	99
DIN 6335-GG-50-B10-C	50	32	18	20	10	-	18	103
DIN 6335-GG-50-M10-D	50	32	18	20	-	M10	16	101
DIN 6335-GG-50-M10-E	50	32	18	20	-	M10	18	105
DIN 6335-GG-63-B12-B	63	40	20	25	12	-	-	158
DIN 6335-GG-63-B12-C	63	40	20	25	12	-	22	169
DIN 6335-GG-63-M12-D	63	40	20	25	-	M12	20	180
DIN 6335-GG-63-M12-E	63	40	20	25	-	M12	22	200
DIN 6335-GG-80-B16-B	80	50	25	30	16	-	-	332
DIN 6335-GG-80-B16-C	80	50	25	30	16	-	28	341
DIN 6335-GG-80-M16-D	80	50	25	30	-	M16	20	329
DIN 6335-GG-80-M16-E	80	50	25	30	-	M16	28	350
DIN 6335-GG-100-B20-B	100	63	32	38	20	-	-	622
DIN 6335-GG-100-B20-C	100	63	32	38	20	-	36	682
DIN 6335-GG-100-M20-D	100	63	32	38	-	M20	25	640
DIN 6335-GG-100-M20-E	100	63	32	38	-	M20	36	715