


GN 806

Protective caps

- **Body**
Black elastomer, hardness 85 Shore.
- **Threaded insert**
Zinc-plated steel (type B from D=12 to 26 mm).

Features and applications

GN 806 protective caps can be used with ISO 4017 hexagon screws or together with threaded pins type B, as thrust pins with soft clamping head surface or as soft end stop bolts. A typical application is in conjunction with toggle clamps (see page).

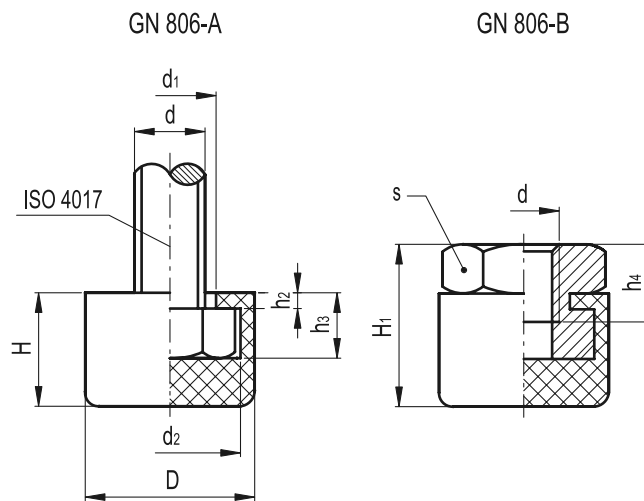

Standard Elements	Main dimensions										⚖
Description	D	H	H ₁	d	d ₁	d ₂	h ₂	h ₃	h ₄	s	g
GN 806-11-A	11	6.5	-	M4	5.5	8.2	1	4	-	-	1
GN 806-12-A	12	8	-	M5	7	9.3	1.5	5.3	-	-	1
GN 806-15-A	15	10	-	M6	8.5	11.5	2	6	-	-	2
GN 806-19-A	19	13	-	M8	11	15	2	7.5	-	-	4
GN 806-24-A	24	16	-	M10	13	20	2.2	9.2	-	-	7
GN 806-26-A	26	19	-	M12	16	22	2.5	10.5	-	-	10
GN 806-12-B	12	8	11	M5	7	9.3	1.5	5.3	6	10	4
GN 806-15-B	15	10	14	M6	8.5	11.5	2	6	7	12	10
GN 806-19-B	19	13	18	M8	11	15	2	7.5	8.5	16	15
GN 806-24-B	24	16	23.5	M10	13	20	2.2	9.2	10	21	38
GN 806-26-B	26	19	26	M12	16	22	2.5	10.5	12	22	43