





GN 928

Shaft clamping units "trueround"

- **Body**
Black-oxide steel.
- **Cap screw**
DIN 912, zinc-plated steel.

Features and applications

GN 928 shaft clamping units are used to clamp economically and rapidly round workpieces from 6 to 125 mm. For the application of GN 928 on large holders and away from the outside edge, spacers or special bolts are available.

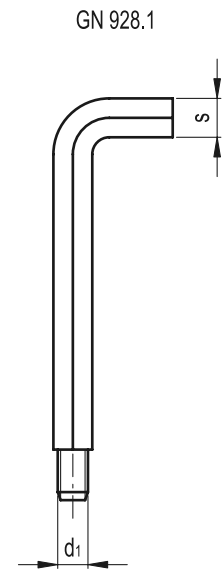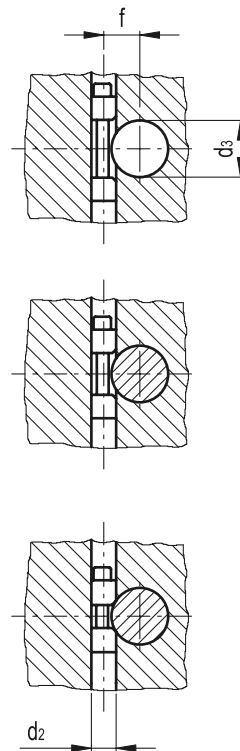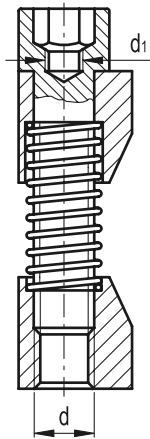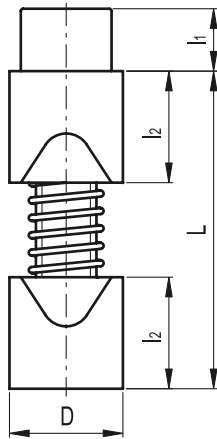

Standard Elements	Main dimensions										⚖	Mounting tool
Description	D h11	d	d1	d2 H7	d3	L	l1	l2	f +0.2	s	g	
GN 928-8	8	M4	M2.5	8	6 to 10	22	4	8	$d3/2 + 2.8$	3	5	GN 928.1-3
GN 928-10	10	M5	M3	10	10 to 15	30	5	10	$d3/2 + 3.3$	4	15	GN 928.1-4
GN 928-12	12	M6	M4	12	15 to 20	36	6	12	$d3/2 + 3.5$	5	20	GN 928.1-5
GN 928-16	16	M8	M5	16	20 to 30	48	8	16	$d3/2 + 4$	6	52	GN 928.1-6
GN 928-20	20	M10	M6	20	30 to 40	60	10	20	$d3/2 + 4.8$	8	105	GN 928.1-8
GN 928-25	25	M12	M8	25	40 to 60	72	12	25	$d3/2 + 5.6$	10	190	GN 928.1-10
GN 928-30	30	M16	M10	30	60 to 125	85	16	30	$d3/2 + 7.9$	14	345	GN 928.1-14