



## Levelling elements



- **Base**  
Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.
- **Colour**  
Black, matte finish.
- **Articulated stem**  
Threaded AISI 304 stainless steel and regulation hexagon.
- **No-slip disk**  
NBR synthetic rubber, hardness 70 Shore A.  
- LS.A: without no-slip disk.  
- LS.A-AS: with no-slip disk, supplied assembled.

### Accessories on request

AISI 304 stainless steel nut to be ordered separately (see Nuts NT. on page 756).

### Features and applications


The particular configuration of bases and no-slip disks assures a strong assembly, preventing separation in case of strong impact or adhesion with the floor (see No-slip disks on page 756).

AISI 304 stainless steel, with low sulphur contents (less than 0.030%) is particularly resistant to corrosion. LS.A-32-SST levelling elements are particularly suitable for applications on machines and equipment in those sectors where laws or particular hygienic, climatic and environmental factors make it mandatory to use corrosion resistant materials.

### Order information

To order bases and stems separately, see the table of the possible combinations Bases/Stems (see page 757).

The levelling element is **supplied unassembled** to make carriage and storage easier; the components are in separate packing: less volume taken and better protection from scratches and dirt.

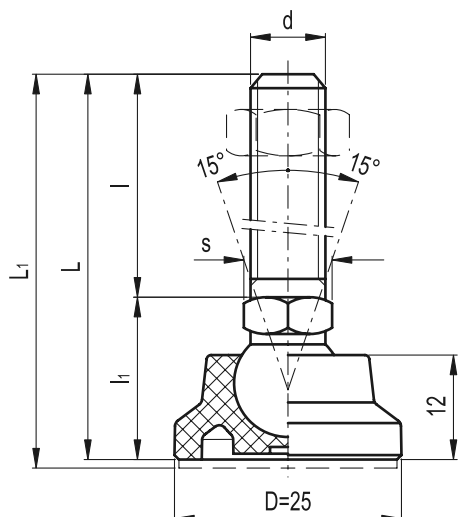

Without no-slip disk		With no-slip disk		Main dimensions				Threaded stem		Articulation	Wrench	Max limit static load*	⚖	
Code	Description	Code	Description	D	L	L1#	h1	d	l	Ø	s	[N]	g	g#
351121	LS.A-25-14-SST-M8x43	356121	LS.A-25-14-AS-SST-M8x43	25	67	70	24	M8	43	14	14	5000	33	35
351125	LS.A-25-14-SST-M8x68	356125	LS.A-25-14-AS-SST-M8x68	25	92	95	24	M8	68	14	14	5000	43	45
351221	LS.A-25-14-SST-M10x43	356221	LS.A-25-14-AS-SST-M10x43	25	67	70	24	M10	43	14	14	5000	43	45
351225	LS.A-25-14-SST-M10x68	356225	LS.A-25-14-AS-SST-M10x68	25	92	95	24	M10	68	14	14	5000	56	58
351231	LS.A-25-14-SST-M10x98	356231	LS.A-25-14-AS-SST-M10x98	25	122	125	24	M10	98	14	14	5000	70	72
351321	LS.A-25-14-SST-M12x43	356321	LS.A-25-14-AS-SST-M12x43	25	67	70	24	M12	43	14	14	5000	53	55
351325	LS.A-25-14-SST-M12x68	356325	LS.A-25-14-AS-SST-M12x68	25	92	95	24	M12	68	14	14	5000	71	73
351331	LS.A-25-14-SST-M12x98	356331	LS.A-25-14-AS-SST-M12x98	25	122	125	24	M12	98	14	14	5000	93	95
351521	LS.A-25-14-SST-M16x68	356521	LS.A-25-14-AS-SST-M16x68	25	92	95	24	M16	68	14	16	5000	116	118
351525	LS.A-25-14-SST-M16x108	356525	LS.A-25-14-AS-SST-M16x108	25	132	135	24	M16	108	14	16	5000	167	169
351541	LS.A-25-14-SST-M16x148	356541	LS.A-25-14-AS-SST-M16x148	25	172	175	24	M16	148	14	16	5000	220	222
351561	LS.A-25-14-SST-M16x168	356561	LS.A-25-14-AS-SST-M16x168	25	192	195	24	M16	168	14	16	5000	247	249

\* "Max limit static load" means the value over which the applied load to the element, in certain conditions of use, may cause plastic material deformation.



# Data with no-slip disk mounted.

# LS.A-SST

11

720

Leveling elements

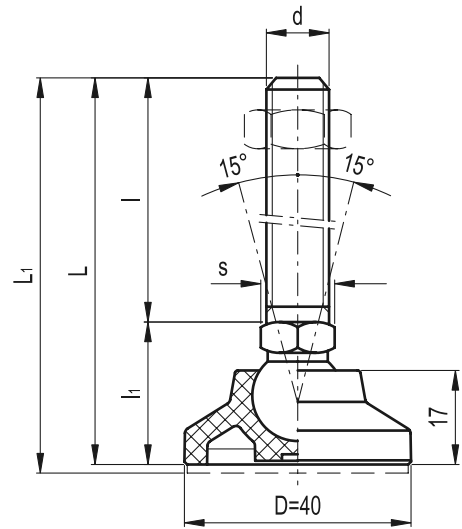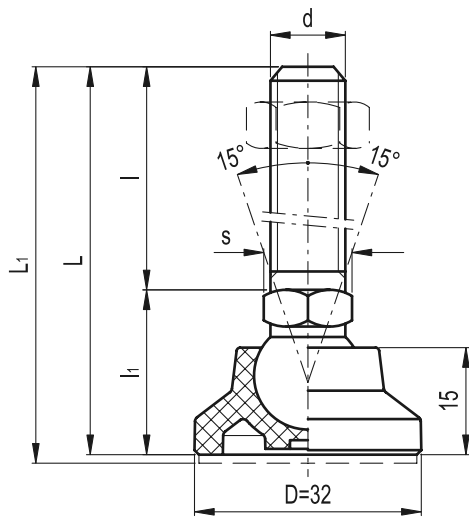

Without no-slip disk		With no-slip disk		Main dimensions				Threaded stem		Articulation	Wrench	Max limit static load*	⚖	
Code	Description	Code	Description	D	L	L1#	l1	d	l	Ø	s	[N]	g	g#
352121	LS.A-32-14-SST-M8x43	357121	LS.A-32-14-AS-SST-M8x43	32	68	71	25	M8	43	14	14	7000	38	42
352125	LS.A-32-14-SST-M8x68	357125	LS.A-32-14-AS-SST-M8x68	32	93	96	25	M8	68	14	14	7000	48	52
352221	LS.A-32-14-SST-M10x43	357221	LS.A-32-14-AS-SST-M10x43	32	68	71	25	M10	43	14	14	7000	48	52
352225	LS.A-32-14-SST-M10x68	357225	LS.A-32-14-AS-SST-M10x68	32	93	96	25	M10	68	14	14	7000	61	65
352231	LS.A-32-14-SST-M10x98	357231	LS.A-32-14-AS-SST-M10x98	32	123	126	25	M10	98	14	14	7000	75	79
352321	LS.A-32-14-SST-M12x43	357321	LS.A-32-14-AS-SST-M12x43	32	68	71	25	M12	43	14	14	7000	58	62
352325	LS.A-32-14-SST-M12x68	357325	LS.A-32-14-AS-SST-M12x68	32	93	96	25	M12	68	14	14	7000	78	82
352331	LS.A-32-14-SST-M12x98	357331	LS.A-32-14-AS-SST-M12x98	32	123	126	25	M12	98	14	14	7000	98	102
352521	LS.A-32-14-SST-M16x68	357521	LS.A-32-14-AS-SST-M16x68	32	93	97	25	M16	68	14	16	7000	121	125
352525	LS.A-32-14-SST-M16x108	357525	LS.A-32-14-AS-SST-M16x108	32	133	137	25	M16	108	14	16	7000	175	179
352541	LS.A-32-14-SST-M16x148	357541	LS.A-32-14-AS-SST-M16x148	32	173	176	25	M16	148	14	16	7000	228	232
352561	LS.A-32-14-SST-M16x168	357561	LS.A-32-14-AS-SST-M16x168	32	193	196	25	M16	168	14	16	7000	255	259
353121	LS.A-40-14-SST-M8x43	358121	LS.A-40-14-AS-SST-M8x43	40	68	71	25	M8	43	14	14	10000	42	49
353125	LS.A-40-14-SST-M8x68	358125	LS.A-40-14-AS-SST-M8x68	40	93	96	25	M8	68	14	14	10000	52	59
353221	LS.A-40-14-SST-M10x43	358221	LS.A-40-14-AS-SST-M10x43	40	68	71	25	M10	43	14	14	10000	52	59
353225	LS.A-40-14-SST-M10x68	358225	LS.A-40-14-AS-SST-M10x68	40	93	96	25	M10	68	14	14	10000	65	72
353231	LS.A-40-14-SST-M10x98	358231	LS.A-40-14-AS-SST-M10x98	40	123	126	25	M10	98	14	14	10000	79	86
353321	LS.A-40-14-SST-M12x43	358321	LS.A-40-14-AS-SST-M12x43	40	68	71	25	M12	43	14	14	10000	62	69
353325	LS.A-40-14-SST-M12x68	358325	LS.A-40-14-AS-SST-M12x68	40	93	96	25	M12	68	14	14	10000	80	87
353331	LS.A-40-14-SST-M12x98	358331	LS.A-40-14-AS-SST-M12x98	40	123	126	25	M12	98	14	14	10000	102	109
353521	LS.A-40-14-SST-M16x68	358521	LS.A-40-14-AS-SST-M16x68	40	93	96	25	M16	68	14	16	10000	125	132
353525	LS.A-40-14-SST-M16x108	358525	LS.A-40-14-AS-SST-M16x108	40	133	136	25	M16	108	14	16	10000	179	186
353541	LS.A-40-14-SST-M16x148	358541	LS.A-40-14-AS-SST-M16x148	40	173	176	25	M16	148	14	16	10000	232	239
353561	LS.A-40-14-SST-M16x168	358561	LS.A-40-14-AS-SST-M16x168	40	193	196	25	M16	168	14	16	10000	259	266

\* "Max limit static load" means the value over which the applied load to the element, in certain conditions of use, may cause plastic material deformation.

# Data with no-slip disk mounted.



**eleSA-GANTER**


ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

# LS.A-SST

11

721

Levelling elements

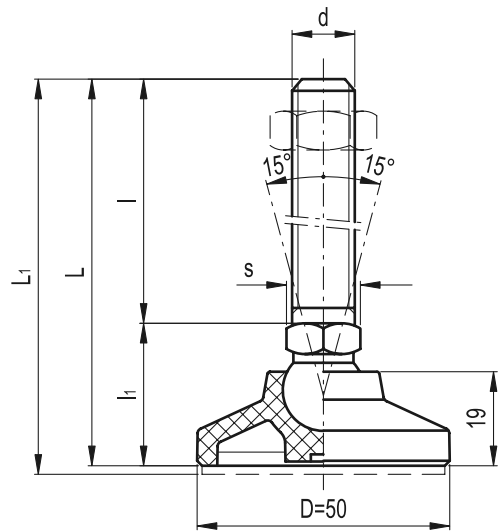

Without no-slip disk		With no-slip disk		Main dimensions				Threaded stem		Articulation	Wrench	Max limit static load*	⚖	
Code	Description	Code	Description	D	L	L1#	l1	d	l	Ø	s	[N]	g	g#
354121	LS.A-50-14-SST-M8x43	359121	LS.A-50-14-AS-SST-M8x43	50	70	73	27	M8	43	14	14	10000	49	61
354125	LS.A-50-14-SST-M8x68	359125	LS.A-50-14-AS-SST-M8x68	50	95	98	27	M8	68	14	14	10000	59	71
354221	LS.A-50-14-SST-M10x43	359221	LS.A-50-14-AS-SST-M10x43	50	70	73	27	M10	43	14	14	10000	59	71
354225	LS.A-50-14-SST-M10x68	359225	LS.A-50-14-AS-SST-M10x68	50	95	98	27	M10	68	14	14	10000	72	84
354231	LS.A-50-14-SST-M10x98	359231	LS.A-50-14-AS-SST-M10x98	50	125	128	27	M10	98	14	14	10000	86	98
354321	LS.A-50-14-SST-M12x43	359321	LS.A-50-14-AS-SST-M12x43	50	70	73	27	M12	43	14	14	10000	69	81
354325	LS.A-50-14-SST-M12x68	359325	LS.A-50-14-AS-SST-M12x68	50	95	98	27	M12	68	14	14	10000	87	99
354331	LS.A-50-14-SST-M12x98	359331	LS.A-50-14-AS-SST-M12x98	50	125	128	27	M12	98	14	14	10000	109	121
354521	LS.A-50-14-SST-M16x68	359521	LS.A-50-14-AS-SST-M16x68	50	95	98	27	M16	68	14	16	10000	132	144
354525	LS.A-50-14-SST-M16x108	359525	LS.A-50-14-AS-SST-M16x108	50	135	138	27	M16	108	14	16	10000	185	197
354541	LS.A-50-14-SST-M16x148	359541	LS.A-50-14-AS-SST-M16x148	50	175	178	27	M16	148	14	16	10000	239	251
354561	LS.A-50-14-SST-M16x168	359561	LS.A-50-14-AS-SST-M16x168	50	195	198	27	M16	168	14	16	10000	266	278

\* "Max limit static load" means the value over which the applied load to the element, in certain conditions of use, may cause plastic material deformation.

# Data with no-slip disk mounted.