



GN 480.1-NI

Retaining rods / tubings, round

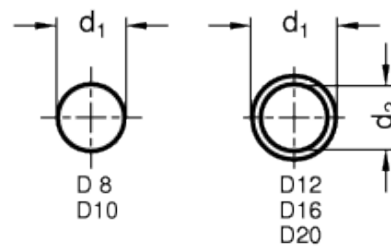

INOX
Stainless Steel

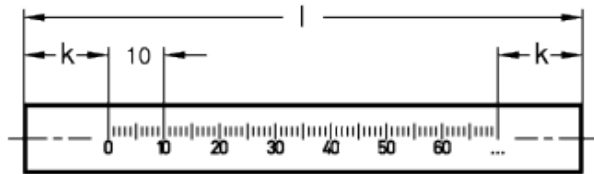

technical informations

Material

AISI 304 stainless steel NI.

Types

- Type OS: without scale.
- Type LS: with scale (mm-graduation), engraved by precision laser.

Features and applications

The outside dimensions of the retaining rods / retaining tubings GN 480.1 are matched for use with clamp mountings. The retaining tubings can also be used as cable lead-through or cable glands.

Special executions on request (For sufficient quantities)

Retaining rods / tubings with other scales.

| Standard Elements | Main dimensions | | | | Weight |
|------------------------|-----------------|----------|----------------|----|--------|
| Description | d ₁ | Length l | d ₂ | k | g |
| GN 480.1-D8-100-NI-OS | D8 | 100 | - | 15 | 39 |
| GN 480.1-D8-150-NI-OS | D8 | 150 | - | 15 | 59 |
| GN 480.1-D8-200-NI-OS | D8 | 200 | - | 15 | 78 |
| GN 480.1-D8-250-NI-OS | D8 | 250 | - | 15 | 98 |
| GN 480.1-D8-300-NI-OS | D8 | 300 | - | 15 | 118 |
| GN 480.1-D10-100-NI-OS | D10 | 100 | - | 15 | 62 |
| GN 480.1-D10-150-NI-OS | D10 | 150 | - | 15 | 100 |
| GN 480.1-D10-200-NI-OS | D10 | 200 | - | 15 | 123 |
| GN 480.1-D10-250-NI-OS | D10 | 250 | - | 15 | 154 |
| GN 480.1-D10-300-NI-OS | D10 | 300 | - | 15 | 185 |
| GN 480.1-D12-100-NI-OS | D12 | 100 | 9 | 15 | 37 |
| GN 480.1-D12-150-NI-OS | D12 | 150 | 9 | 15 | 56 |
| GN 480.1-D12-200-NI-OS | D12 | 200 | 9 | 15 | 74 |
| GN 480.1-D12-250-NI-OS | D12 | 250 | 9 | 15 | 93 |
| GN 480.1-D12-300-NI-OS | D12 | 300 | 9 | 15 | 112 |
| GN 480.1-D16-100-NI-OS | D16 | 100 | 13 | 20 | 54 |
| GN 480.1-D16-150-NI-OS | D16 | 150 | 13 | 20 | 82 |
| GN 480.1-D16-200-NI-OS | D16 | 200 | 13 | 20 | 109 |
| GN 480.1-D16-250-NI-OS | D16 | 250 | 13 | 20 | 137 |
| GN 480.1-D16-300-NI-OS | D16 | 300 | 13 | 20 | 164 |
| GN 480.1-D20-100-NI-OS | D20 | 100 | 16 | 25 | 85 |
| GN 480.1-D20-150-NI-OS | D20 | 150 | 16 | 25 | 127 |
| GN 480.1-D20-200-NI-OS | D16 | 200 | 16 | 25 | 170 |
| GN 480.1-D20-250-NI-OS | D20 | 250 | 16 | 25 | 213 |
| GN 480.1-D20-300-NI-OS | D20 | 300 | 16 | 25 | 256 |
| GN 480.1-D8-100-NI-LS | D8 | 100 | - | 15 | 39 |
| GN 480.1-D8-150-NI-LS | D8 | 150 | - | 15 | 59 |
| GN 480.1-D8-200-NI-LS | D8 | 200 | - | 15 | 78 |
| GN 480.1-D8-250-NI-LS | D8 | 250 | - | 15 | 98 |
| GN 480.1-D8-300-NI-LS | D8 | 300 | - | 15 | 118 |
| GN 480.1-D10-100-NI-LS | D10 | 100 | - | 15 | 62 |
| GN 480.1-D10-150-NI-LS | D10 | 150 | - | 15 | 100 |
| GN 480.1-D10-200-NI-LS | D10 | 200 | - | 15 | 123 |
| GN 480.1-D10-250-NI-LS | D10 | 250 | - | 15 | 154 |
| GN 480.1-D10-300-NI-LS | D10 | 300 | - | 15 | 185 |
| GN 480.1-D12-100-NI-LS | D12 | 100 | 9 | 15 | 37 |
| GN 480.1-D12-150-NI-LS | D12 | 150 | 9 | 15 | 56 |
| GN 480.1-D12-200-NI-LS | D12 | 200 | 9 | 15 | 74 |
| GN 480.1-D12-250-NI-LS | D12 | 250 | 9 | 15 | 93 |
| GN 480.1-D12-300-NI-LS | D12 | 300 | 9 | 15 | 112 |
| GN 480.1-D16-100-NI-LS | D16 | 100 | 13 | 20 | 54 |
| GN 480.1-D16-150-NI-LS | D16 | 150 | 13 | 20 | 82 |

| | | | | | |
|------------------------|-----|-----|----|----|-----|
| GN 480.1-D16-200-NI-LS | D16 | 200 | 13 | 20 | 109 |
| GN 480.1-D16-250-NI-LS | D16 | 250 | 13 | 20 | 137 |
| GN 480.1-D16-300-NI-LS | D16 | 300 | 13 | 20 | 164 |
| GN 480.1-D20-100-NI-LS | D20 | 100 | 16 | 25 | 85 |
| GN 480.1-D20-150-NI-LS | D20 | 150 | 16 | 25 | 127 |
| GN 480.1-D20-200-NI-LS | D20 | 200 | 16 | 25 | 170 |
| GN 480.1-D20-250-NI-LS | D20 | 250 | 16 | 25 | 213 |
| GN 480.1-D20-300-NI-LS | D20 | 300 | 16 | 25 | 256 |



STANDARD MACHINE ELEMENTS WORLDWIDE