

Guide rail clamps



• **Material**

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

• **Colour**

Black, matte finish.



• **Standard executions**

AISI 304 stainless steel cylindrical head screws with hexagon socket, nickel-plated brass nuts.

- **MPG-C**: for round guide.
- **MPG-T**: for both the standard trapezoidal guides.
- **MPG-R**: for rectangular guide.

Assembly instructions

- Mount the guide rail clamp on the support bar (dimension 25x8 mm), the assembly consists in inserting the bar into the specific clamp slot (Fig.1).
- Insert the guide into the clamp housing and then clamp the screws (Fig.2).
- Set the height of the clamp and clamp by means of a M8 screw, not supplied (Fig.3).

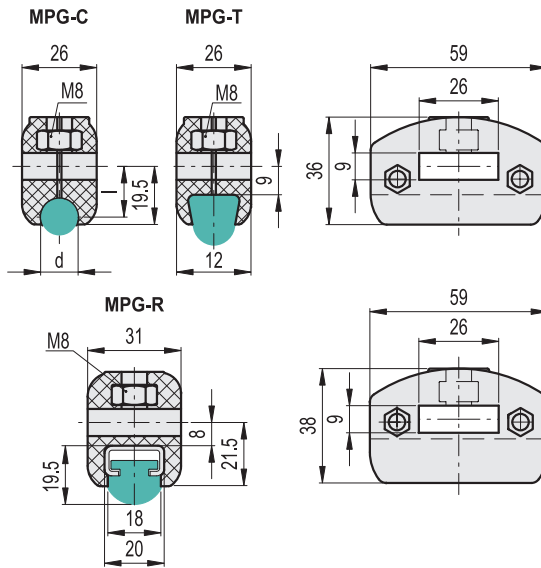

Standard Elements		Main dimensions		△△
Code	Description	d	l	g
419749	MPG-C-8	8	16	44
419788	MPG-C-10	10	15	45
419687	MPG-C-12	12	15	46
419787	MPG-C-14	14	15	47
419688	MPG-T	-	-	46
419698	MPG-R	-	-	50