GN 111.2

INOX
Stainless Steel

Retaining cables

RoHS

- **Retaining cable**
  Stainless steel coated with clear plastic (PVC).
- **Fixing loop and key ring**
  Stainless steel.
- **Standard versions available**
  - Type **A**: with 2 key rings.
  - Type **B**: with fastening lug and key ring.
  - Type **C**: with 2 fastening lugs.

Accessories on request
Single key rings GN 111.3 (see page 361).

Features and applications
Retaining cables GN 111.2 are mainly used in connection with ball lock pins and pins with axial lock.
The key rings are supplied unmounted. Both rings have the same Ø d1. The load values given in the above table at shear stress are theoretically obtained and indicative only. They are non-binding recommended values and rule out any liability.

Instructions of use
- Suitable for ball lock pins and pins with axial lock
  1) GN 113.1, GN 124 Ø 6, Ø 8,
  GN 113.3, GN 113.4, GN 113.5, GN 113.6, GN 113.7,
  GN 113.8, GN 114.2, GN 114.3, GN 114.6 all Ø
- Suitable for ball lock pins GN 124
  2) Ø10, Ø12, Ø16

Type **A**

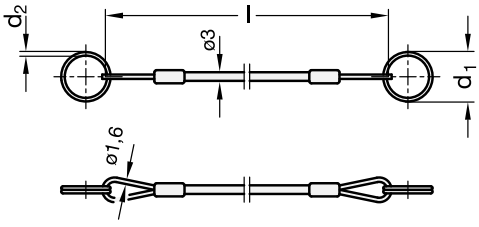

Type **B**

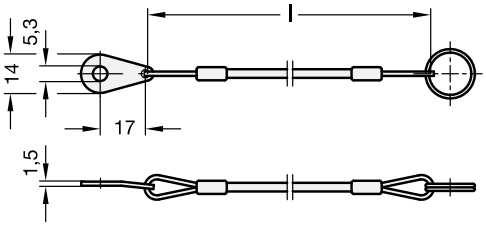

Type **C**

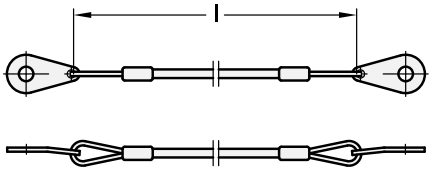

Example of application



elesa+GANTER ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

Standard Elements	Main dimensions			Static load in N ≈		⚖
Description	l	d_1	d_2	With ring	Without ring	g
GN 111.2-150-14-A	150	14 1)	1	50	1800	15
GN 111.2-150-14-B	150	14 1)	1	50	1800	10
GN 111.2-150-C	150	-	-	-	-	5
GN 111.2-150-18-A	150	18 2)	1.3	90	1800	6
GN 111.2-150-18-B	150	18 2)	1.3	90	1800	7
GN 111.2-150-24-A	150	24	1.5	100	1800	8
GN 111.2-150-24-B	150	24	1.5	100	1800	10
GN 111.2-150-30-A	150	30	1.8	120	1800	8
GN 111.2-150-30-B	150	30	1.8	120	1800	10
GN 111.2-200-14-A	200	14 1)	1	50	1800	20
GN 111.2-200-14-B	200	14 1)	1	50	1800	7
GN 111.2-200-C	200	-	-	-	-	5
GN 111.2-200-18-A	200	18 2)	1.3	90	1800	6
GN 111.2-200-18-B	200	18 2)	1.3	90	1800	8
GN 111.2-200-24-A	200	24	1.5	100	1800	9
GN 111.2-200-24-B	200	24	1.5	100	1800	9
GN 111.2-200-30-A	200	30	1.8	120	1800	10
GN 111.2-200-30-B	200	30	1.8	120	1800	20
GN 111.2-320-14-A	320	14 1)	1	50	1800	10
GN 111.2-320-14-B	320	14 1)	1	50	1800	10
GN 111.2-320-C	320	-	-	-	-	5
GN 111.2-320-18-A	320	18 2)	1.3	90	1800	10
GN 111.2-320-18-B	320	18 2)	1.3	90	1800	9
GN 111.2-320-24-A	320	24	1.5	100	1800	14
GN 111.2-320-24-B	320	24	1.5	100	1800	7
GN 111.2-320-30-A	320	30	1.8	120	1800	20
GN 111.2-320-30-B	320	30	1.8	120	1800	20
GN 111.2-500-14-A	500	14 1)	1	50	1800	20
GN 111.2-500-14-B	500	14 1)	1	50	1800	13
GN 111.2-500-18-A	500	18 2)	1.3	90	1800	10
GN 111.2-500-18-B	500	18 2)	1.3	90	1800	6
GN 111.2-500-24-A	500	24	1.5	100	1800	35
GN 111.2-500-24-B	500	24	1.5	100	1800	30
GN 111.2-500-30-A	500	30	1.8	120	1800	20
GN 111.2-500-30-B	500	30	1.8	120	1800	20
GN 111.2-500-C	500	-	-	-	-	5

ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.