

GN 869.1

EXTENDED RANGE

Static holders



Material

Black-oxide steel C45.

Parts included in the supply

Hexagon socket head cap screws DIN 912 and guide bushes GN 870 (see page 672).




Clamping bolts

- Version **E**: for one clamping bolt.
- Version **Z**: for two clamping bolts.



Features and applications

The static holders GN 869.1 have been designed for use with power clamps GN 865 (see page 661).

Static holders for two clamping bolts (version **Z**) are preferably used in such applications where absolutely rigid clamping of a sheet metal component is essential. For the same purpose ball point screws with serrated ball pads GN 605 (see catalogue 038, page 591) are ideally suited.

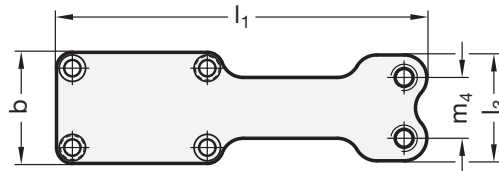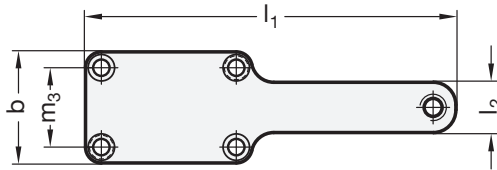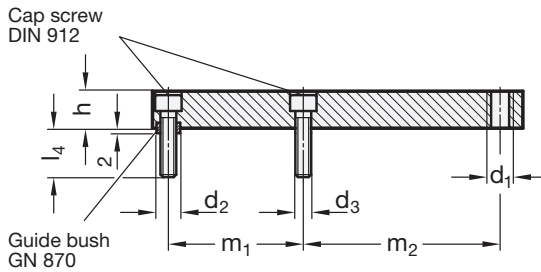

Mounting examples

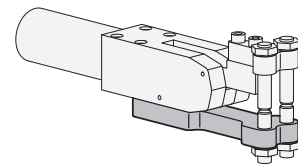

14

668

Hook, toggle and power clamps

Standard Elements	Main dimensions													△△
Description	b	d1	d2 H8/h6	d3	h	l1	l2	l3	l4	m1	m2	m3	m4	g
GN 869.1-32-E	32	M8	7	M5	10	98.5	15	-	8	34	53	22	-	130
GN 869.1-32-Z	32	M8	7	M5	10	98.5	-	30	8	34	53	22	17	150
GN 869.1-42-E	42	M10	9	M6	14	140	19	-	8.5	51	74.4	30	-	220
GN 869.1-42-Z	42	M10	9	M6	14	140	-	40	8.5	51	74.4	30	23	410
GN 869.1-52-E	52	M12	11	M8	16	168	22	-	12.5	62	88.5	37	-	380
GN 869.1-52-Z	52	M12	11	M8	16	168	-	50	12.5	62	88.5	37	30	900
GN 869.1-62-E	62	M12	13	M10	18	192.5	22	-	12.5	71.5	102	44	-	690
GN 869.1-62-Z	62	M12	13	M10	18	192.5	-	60	12.5	71.5	102	44	40	1020