

GN 903

EXTENDED RANGE

Clamping bolts

RoHS

- **Clamping pad**

Acetal based (POM) technopolymer, black colour, matte finish, temperature resistant up to 80°C.

- **Grub screw**


Black-oxide steel **ST** (tensile strength 500 N/mm²).

- **Hexagon nuts**

Zinc-plated steel, blue passivated.

Features and applications


The ball end of the grub screw can be hit easily into the clamping pad and removed.

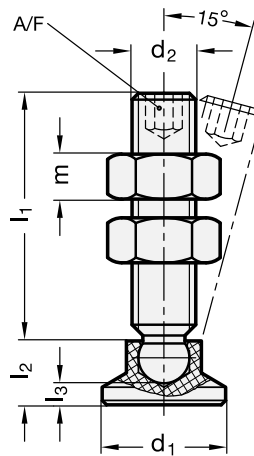

14

654

Hook, toggle and power clamps

Standard Elements	Main dimensions							
Description	d1	d2	l1	l2	l3 ≈	m	A/F	g
GN 903-15-M6-26-ST	15	M6	26	7.6	3.6	5.2	3	12
GN 903-15-M6-36-ST	15	M6	36	7.6	3.6	5.2	3	15
GN 903-15-M6-46-ST	15	M6	46	7.6	3.6	5.2	3	17
GN 903-15-M8-20-ST	15	M8	20	7.6	2.5	6.8	4	18
GN 903-15-M8-35-ST	15	M8	35	7.6	2.5	6.8	4	21
GN 903-15-M8-45-ST	15	M8	45	7.6	2.5	6.8	4	24
GN 903-15-M8-58-ST	15	M8	58	7.6	2.5	6.8	4	28
GN 903-18-M8-20-ST	18	M8	20	9.2	4.2	6.8	4	19
GN 903-18-M8-35-ST	18	M8	35	9.2	4.2	6.8	4	22
GN 903-18-M8-45-ST	18	M8	45	9.2	4.2	6.8	4	25
GN 903-18-M8-58-ST	18	M8	58	9.2	4.2	6.8	4	29
GN 903-18-M10-34-ST	18	M10	34	9.2	3.8	8.4	5	34
GN 903-18-M10-44-ST	18	M10	44	9.2	3.8	8.4	5	40
GN 903-18-M10-57-ST	18	M10	57	9.2	3.8	8.4	5	47
GN 903-18-M10-74-ST	18	M10	74	9.2	3.8	8.4	5	55
GN 903-21-M8-20-ST	21	M8	20	10	5	6.8	4	19
GN 903-21-M8-35-ST	21	M8	35	10	5	6.8	4	22
GN 903-21-M8-45-ST	21	M8	45	10	5	6.8	4	25
GN 903-21-M8-58-ST	21	M8	58	10	5	6.8	4	29
GN 903-21-M10-34-ST	21	M10	34	10	4.3	8.4	5	35
GN 903-21-M10-44-ST	21	M10	44	10	4.3	8.4	5	41
GN 903-21-M10-57-ST	21	M10	57	10	4.3	8.4	5	48
GN 903-21-M10-74-ST	21	M10	74	10	4.3	8.4	5	56
GN 903-21-M12-34-ST	21	M12	34	10	3.4	10.8	6	47
GN 903-21-M12-57-ST	21	M12	57	10	3.4	10.8	6	68
GN 903-21-M12-74-ST	21	M12	74	10	3.4	10.8	6	80
GN 903-21-M12-94-ST	21	M12	94	10	3.4	10.8	6	95
GN 903-25-M8-20-ST	25	M8	20	10.5	5.5	6.8	4	21
GN 903-25-M8-35-ST	25	M8	35	10.5	5.5	6.8	4	24
GN 903-25-M8-45-ST	25	M8	45	10.5	5.5	6.8	4	27
GN 903-25-M8-58-ST	25	M8	58	10.5	5.5	6.8	4	31
GN 903-25-M10-34-ST	25	M10	34	10.5	4.6	8.4	5	37
GN 903-25-M10-44-ST	25	M10	44	10.5	4.6	8.4	5	43
GN 903-25-M10-57-ST	25	M10	57	10.5	4.6	8.4	5	50
GN 903-25-M10-74-ST	25	M10	74	10.5	4.6	8.4	5	58
GN 903-25-M12-34-ST	25	M12	34	10.5	3.6	10.8	6	49
GN 903-25-M12-57-ST	25	M12	57	10.5	3.6	10.8	6	70
GN 903-25-M12-74-ST	25	M12	74	10.5	3.6	10.8	6	82
GN 903-25-M12-94-ST	25	M12	94	10.5	3.6	10.8	6	97
GN 903-32-M8-20-ST	32	M8	20	11	6	6.8	4	16
GN 903-32-M8-35-ST	32	M8	35	11	6	6.8	4	20
GN 903-32-M8-45-ST	32	M8	45	11	6	6.8	4	24
GN 903-32-M8-58-ST	32	M8	58	11	6	6.8	4	20
GN 903-32-M10-34-ST	32	M10	34	11	5	8.4	5	29
GN 903-32-M10-44-ST	32	M10	44	11	5	8.4	5	45
GN 903-32-M10-57-ST	32	M10	57	11	5	8.4	5	29
GN 903-32-M10-74-ST	32	M10	74	11	5	8.4	5	50
GN 903-32-M12-34-ST	32	M12	34	11	4.2	10.8	6	37
GN 903-32-M12-57-ST	32	M12	57	11	4.2	10.8	6	37
GN 903-32-M12-74-ST	32	M12	74	11	4.2	10.8	6	76
GN 903-32-M12-94-ST	32	M12	94	11	4.2	10.8	6	76
GN 903-40-M8-20-ST	40	M8	20	13	8	6.8	4	21
GN 903-40-M8-35-ST	40	M8	35	13	8	6.8	4	25
GN 903-40-M8-45-ST	40	M8	45	13	8	6.8	4	29
GN 903-40-M8-58-ST	40	M8	58	13	8	6.8	4	32
GN 903-40-M10-34-ST	40	M10	34	13	7	8.4	5	34
GN 903-40-M10-44-ST	40	M10	44	13	7	8.4	5	40
GN 903-40-M10-57-ST	40	M10	57	13	7	8.4	5	47
GN 903-40-M10-74-ST	40	M10	74	13	7	8.4	5	55
GN 903-40-M12-34-ST	40	M12	34	13	6.2	10.8	6	41
GN 903-40-M12-57-ST	40	M12	57	13	6.2	10.8	6	62
GN 903-40-M12-74-ST	40	M12	74	13	6.2	10.8	6	71
GN 903-40-M12-94-ST	40	M12	94	13	6.2	10.8	6	89