

# ND.Q

ELESA Original design

## Square end-caps for heavy loads



EXTENDED RANGE

- **Material**

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

- **Colour**


Black, matte finish.

- **Standard execution**

Nickel-plated brass with threaded pass-through hole.

**Features**

They can also bear slipping loads contrariwise.

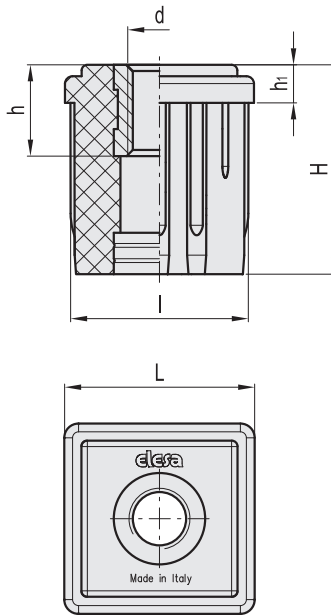

11  
553

Levelling elements

Standard Elements		Main dimensions				Mounting hole		Tube dimensions			Max static load *	⚖
Code	Description	L	H	h <sub>1</sub>	l	d	h	External	Thickness	Internal	[N]	g
319102	ND.Q-30x1.5-M8	30	33	6	27.5	M8	15	30	1.5	27	17000	57
319103	ND.Q-30x1.5-M10	30	33	6	27.5	M10	15	30	1.5	27	17000	56
319104	ND.Q-30x1.5-M12	30	33	6	27.5	M12	18	30	1.5	27	17000	51
319106	ND.Q-30x1.5-M16	30	33	6	27.5	M16	20	30	1.5	27	17000	38
319262	ND.Q-40x2-M8	40	43	8	36.5	M8	15	40	2	36	18000	86
319263	ND.Q-40x2-M10	40	43	8	36.5	M10	15	40	2	36	18000	85
319264	ND.Q-40x2-M12	40	43	8	36.5	M12	18	40	2	36	18000	80
319266	ND.Q-40x2-M16	40	43	8	36.5	M16	20	40	2	36	18000	67
319352	ND.Q-50x2-M12	50	55	10	46.5	M12	18	50	2	46	20000	157
319354	ND.Q-50x2-M16	50	55	10	46.5	M16	20	50	2	46	20000	156
319356	ND.Q-50x2-M20	50	55	10	46.5	M20	30	50	2	46	20000	132
319362	ND.Q-50x2.5-M12	50	55	10	45.5	M12	18	50	2.5	45	20000	153
319364	ND.Q-50x2.5-M16	50	55	10	45.5	M16	20	50	2.5	45	20000	152
319366	ND.Q-50x2.5-M20	50	55	10	45.5	M20	30	50	2.5	45	20000	128

\* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.