

## Tubular handles

RoHS

- **Tube**

AISI 304 stainless steel, ground matte shiny finish.  
Highly resistant to wear, scratches and chemical agents.

- **Handle shanks and tube end caps**

Polyamide based (PA) technopolymer, glass fibre reinforced.  
Temperature resistant up to 100 °C.

- **Assembly**


Front mounting, black zinc-plated steel socket-head DIN 912-M8-85 screws, zinc-plated steel nuts ISO 4032-M8 and zinc-plated steel washers DIN 125.

**Special executions on request** (For sufficient quantities)

Different lengths.

**Features and applications**

Tubular handles GN 666.1 offer an even more extensive size range for any application which require mounting from the front.

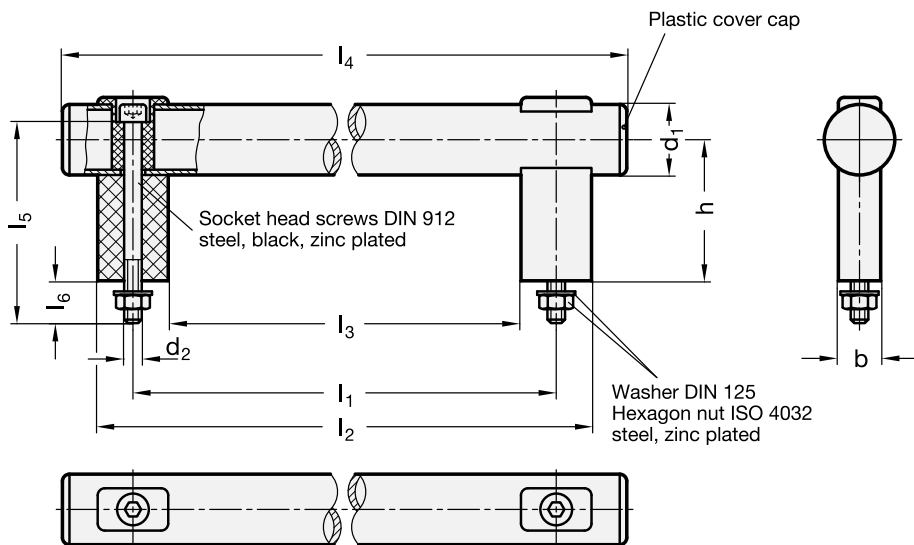

Standard Elements	Main dimensions							Screws			⚠
Description	d1	l1 ±0.5	b	h	l2	l3	l4	d2	l5	l6	g
GN 666.1-30-200-NG	30	200	18	60	230	170	265	M8	85	17	420
GN 666.1-30-250-NG	30	250	18	60	280	220	315	M8	85	17	460
GN 666.1-30-300-NG	30	300	18	60	330	270	365	M8	85	17	520
GN 666.1-30-400-NG	30	400	18	60	430	370	465	M8	85	17	640
GN 666.1-30-500-NG	30	500	18	60	530	470	565	M8	85	17	725
GN 666.1-30-600-NG	30	600	18	60	630	570	665	M8	85	17	800