

# M.943

ELESA Original design

## Handles



### Material

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

### Colour

Black, matte finish.

### Standard executions

- **M.943-B**: brass bosses, threaded blind holes.
- **M.943-AF**: blind holes for self-tapping screws  $\varnothing$  4.8 (UNI ISO 7049).  
Maximum torque recommended 5 Nm.



### Features and applications

Suitable for applications on a 19" rack and instruments in general.



In the column HE of the table below the height units of the front panel are contained: 1 HE = 44.45 mm (1 6/8") to enable you to choose the correct handles.

### Special executions on request

- RAL 7031 grey colour handle, matte finish.
- Chrome-plated handle, matte finish.

### Technical data

Tensile stress and impact strength: F1, F2, L1 and L2 values reported in the table are the result of breaking tests carried out with the appropriate dynamometric equipment under the test conditions shown in the figure with ambient temperature.

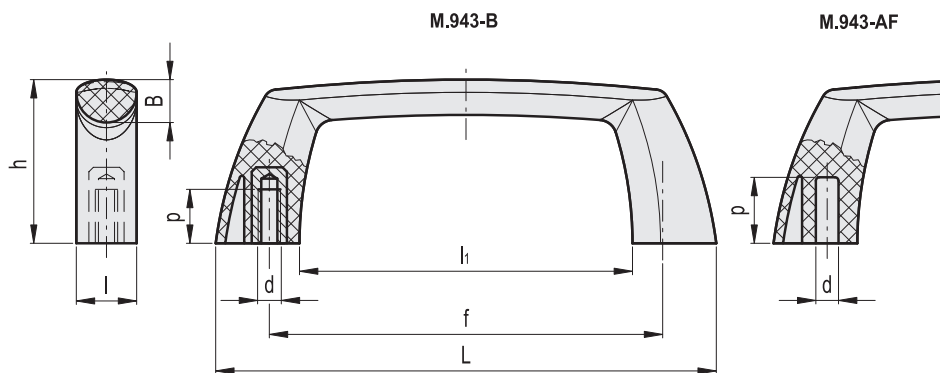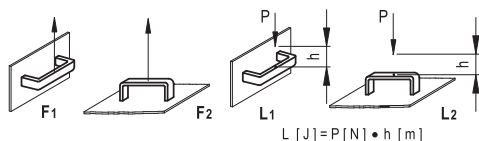

Standard Elements		Main dimensions							Threaded boss		F1	F2	L1	L2	⚖️
Code	Description	L	f	h	B	l	li	HE	d	p	[N]	[N]	[J]	[J]	g
137901	M.943-112-B-M5	112	88±0.5	36.5	9	13.5	74.5	3	M5	10	2000	2200	11	9	26
137921	M.943-144-B-M5	144	120±0.5	42	11	15	106.5	4	M5	10	2000	2200	11	9	34
137906	M.943-112-AF-4.8	112	88±0.5	36.5	9	13.5	74.5	3	4.5	14	2000	2200	11	9	21
137926	M.943-144-AF-4.8	144	120±0.5	42	11	15	106.5	4	4.5	14	2000	2200	11	9	29