

L.652-X p

ELESA Original design

Adjustable handle



Material

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

Colour

Black, matte finish.

Centre cap

Technopolymer, black colour.

Standard execution

Glass-fibre reinforced technopolymer clamping element with tothing and retaining pin, black colour. AISI 302 stainless steel return spring.

Zinc-plated steel threaded stud, chamfered flat end according to UNI 947: ISO 4753 table (see catalogue 038, page A11).

Special executions on request


Different lengths of threaded stud.

Features and applications

Particularly suitable when clamping operations are limited owing to lack of space and the hand of the operator cannot make a complete rotation.

Instructions of use

For clamping, lift the handle to disengage the clamping device tothing and bring it back to start position. By releasing the handle, the return spring automatically engages the tothing.

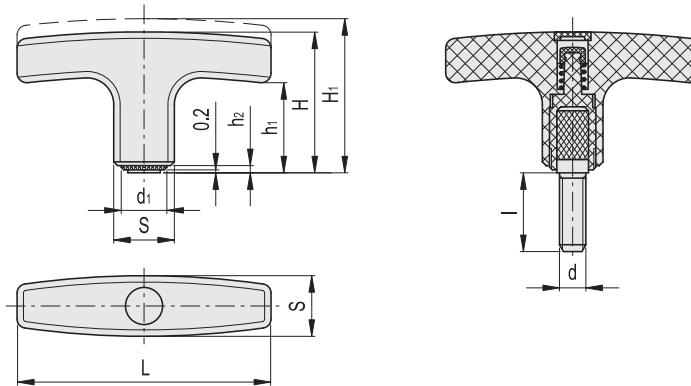

Standard Elements		Main dimensions							Threaded stud		Teeth no.	Δ
Code	Description	L	S	H	H1	h1	h2	d1	d 6g	l	z	g
32741	L.652-X/67 p-M5x10	67	16x16	39	42	26	1	12	M5	10	18	23
32742	L.652-X/67 p-M5x16	67	16x16	39	42	26	1	12	M5	16	18	25
32752	L.652-X/67 p-M6x16	67	16x16	39	42	26	1	12	M6	16	18	27
32753	L.652-X/67 p-M6x25	67	16x16	39	42	26	1	12	M6	25	18	30
32771	L.652-X/80 p-M8x20	80	20x20	42	46	27	1	15	M8	20	20	43
32772	L.652-X/80 p-M8x25	80	20x20	42	46	27	1	15	M8	25	20	45
32782	L.652-X/80 p-M10x30	80	20x20	42	46	27	1	15	M10	30	20	51