GN 653.10-NI

INOX Stainless Steel

Flat knurled thumb screws

RoHS

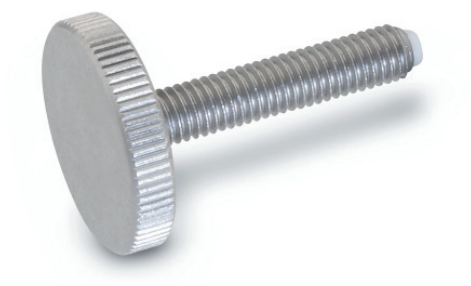

- **Material**
  AISI 304 stainless steel **NI**, sandblasted matte finish, visible face fine turned.
- **Assembly**
  Pivot.
  - Version **MS**: brass.
  - Version **KU**: plastic, polyacetal (POM).

Features and applications

Flat knurled thumb screws GN 653.10 with thrust pads in brass or plastic are used in applications, where marks and damages on the workpiece are unacceptable. The heard dimensions comply with flat knurled thumb screws DIN 653.

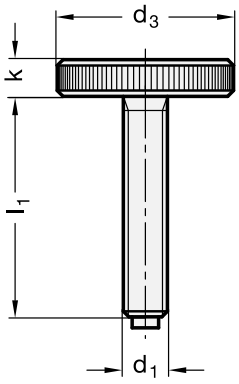



Standard Elements	Main dimensions				Threaded pin		⚖
Description	d_3	l_2	d_2	k	d_1	$l_{1\ -1}$	g
GN 653.10-M5-12-NI-MS	20	0.5	3	4	M5	12	11
GN 653.10-M5-12-NI-KU	20	1	3	4	M5	12	11
GN 653.10-M5-16-NI-MS	20	0.5	3	4	M5	16	12
GN 653.10-M5-16-NI-KU	20	1	3	4	M5	16	12
GN 653.10-M5-20-NI-MS	20	0.5	3	4	M5	20	12
GN 653.10-M5-20-NI-KU	20	1	3	4	M5	20	12
GN 653.10-M5-25-NI-MS	20	0.5	3	4	M5	25	12
GN 653.10-M5-25-NI-KU	20	1	3	4	M5	25	12
GN 653.10-M6-12-NI-MS	24	1	4	5	M6	12	19
GN 653.10-M6-12-NI-KU	24	1.3	3.5	5	M6	12	19
GN 653.10-M6-16-NI-MS	24	1	4	5	M6	16	19
GN 653.10-M6-16-NI-KU	24	1.3	3.5	5	M6	16	19
GN 653.10-M6-20-NI-MS	24	1	4	5	M6	20	20
GN 653.10-M6-20-NI-KU	24	1.3	3.5	5	M6	20	20
GN 653.10-M6-25-NI-MS	24	1	4	5	M6	25	21
GN 653.10-M6-25-NI-KU	24	1.3	3.5	5	M6	25	21
GN 653.10-M6-30-NI-MS	24	1	4	5	M6	30	21
GN 653.10-M6-30-NI-KU	24	1.3	3.5	5	M6	30	22
GN 653.10-M8-16-NI-MS	30	1.5	6	6	M8	16	38
GN 653.10-M8-16-NI-KU	30	1.6	5	6	M8	16	38
GN 653.10-M8-20-NI-MS	30	1.5	6	6	M8	20	39
GN 653.10-M8-20-NI-KU	30	1.6	5	6	M8	20	39
GN 653.10-M8-25-NI-MS	30	1.5	6	6	M8	25	39
GN 653.10-M8-25-NI-KU	30	1.6	5	6	M8	25	39
GN 653.10-M8-30-NI-MS	30	1.5	6	6	M8	30	40
GN 653.10-M8-30-NI-KU	30	1.6	5	6	M8	30	40
GN 653.10-M8-40-NI-MS	30	1.5	6	6	M8	40	43
GN 653.10-M8-40-NI-KU	30	1.6	5	6	M8	40	43

ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.