

Lobe knobs



Material

High-resilience polypropylene based (PP) technopolymer.
VCT.25 made out of glass-fibre reinforced polyamide based (PA) technopolymer.

Resistant to solvents, oils, greases and other chemical agents.

Colour

Black, matte finish.

On request and for sufficient quantities, it can be supplied in other colours or with customised graphic symbols, marks or writings.


Standard executions

- **VCT-A**: black-oxide steel boss, plain blind hole.

- **VCT-B**: brass boss, threaded blind hole (VCT.25 - 95) or threaded pass-through hole (VCT.32 - 40 - 50 - 63 - 74) closed by a centre cap made out of technopolymer, in black colour or in other colours from C2 to C6 (VCT (see page) . with coloured cap).



EXTENDED RANGE

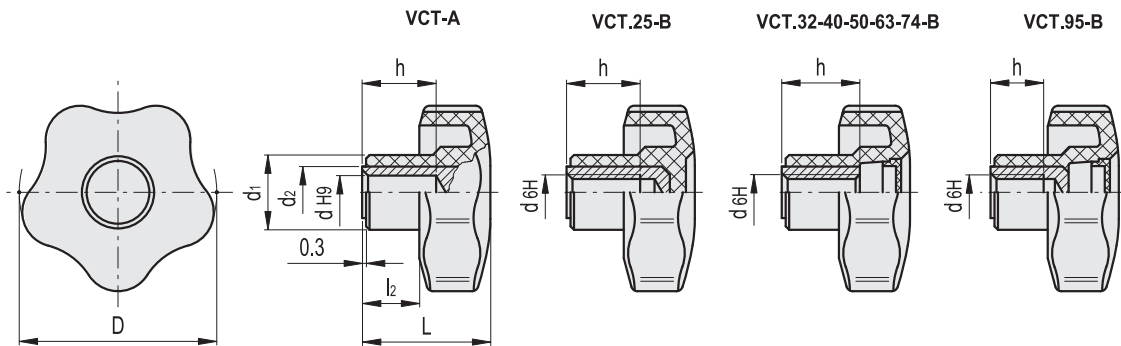

RAL9005

| Standard Elements | | Main dimensions | | | | | Mounting hole | | | C # | ΔΔ |
|-------------------|--------------|-----------------|------|----------------|----------------|----------------|-----------------|-----------------|----|------|-----|
| Code | Description | D | L | d ₁ | d ₂ | l ₂ | d _{H9} | d _{6H} | h | [Nm] | g |
| 69811 | VCT.25 B-M4 | 25 | 19 | 13 | - | 8 | - | M4 | 10 | 6 | 7 |
| 69812 | VCT.25 B-M5 | 25 | 19 | 13 | - | 8 | - | M5 | 10 | 7 | 6 |
| 69813 | VCT.25 B-M6 | 25 | 19 | 13 | - | 8 | - | M6 | 10 | 7 | 5 |
| 69843 | VCT.32 B-M5 | 32 | 23 | 15 | - | 10 | - | M5 | 12 | 10 | 11 |
| 69844 | VCT.32 B-M6 | 32 | 23 | 15 | - | 10 | - | M6 | 12 | 10 | 10 |
| 69845 | VCT.32 B-M8 | 32 | 23 | 15 | - | 10 | - | M8 | 12 | 10 | 9 |
| 69892 | VCT.40 A-8 | 40 | 27 | 17 | 12 | 12 | 8 | - | 14 | - | 36 |
| 69893 | VCT.40 B-M6 | 40 | 27 | 17 | - | 12 | - | M6 | 18 | 16 | 26 |
| 69894 | VCT.40 B-M8 | 40 | 27 | 17 | - | 12 | - | M8 | 18 | 18 | 24 |
| 69895 | VCT.40 B-M10 | 40 | 27 | 17 | - | 12 | - | M10 | 17 | 18 | 23 |
| 69951 | VCT.50 A-8 | 50 | 32 | 19 | 12 | 14 | 8 | - | 14 | - | 37 |
| 69952 | VCT.50 A-10 | 50 | 32 | 19 | 15 | 14 | 10 | - | 16 | - | 34 |
| 69953 | VCT.50 B-M8 | 50 | 32 | 19 | - | 14 | - | M8 | 20 | 25 | 38 |
| 69954 | VCT.50 B-M10 | 50 | 32 | 19 | - | 14 | - | M10 | 20 | 27 | 34 |
| 69955 | VCT.50 B-M12 | 50 | 32 | 19 | - | 14 | - | M12 | 20 | 27 | 30 |
| 70001 | VCT.63 A-8 | 63 | 37 | 22 | 15 | 16 | 8 | - | 20 | - | 52 |
| 70002 | VCT.63 A-10 | 63 | 37 | 22 | 16 | 16 | 10 | - | 21 | - | 49 |
| 70012 | VCT.63 B-M8 | 63 | 37 | 22 | - | 16 | - | M8 | 26 | 48 | 45 |
| 70013 | VCT.63 B-M10 | 63 | 37 | 22 | - | 16 | - | M10 | 26 | 50 | 42 |
| 70014 | VCT.63 B-M12 | 63 | 37 | 22 | - | 16 | - | M12 | 26 | 50 | 40 |
| 70051 | VCT.74 A-8 | 74 | 43.5 | 26 | 15 | 22 | 8 | - | 20 | - | 65 |
| 70062 | VCT.74 B-M12 | 74 | 43.5 | 26 | - | 22 | - | M12 | 26 | 60 | 57 |
| 70063 | VCT.74 B-M14 | 74 | 43.5 | 26 | - | 22 | - | M14 | 26 | 65 | 53 |
| 70064 | VCT.74 B-M16 | 74 | 43.5 | 26 | - | 22 | - | M16 | 31 | 69 | 55 |
| 70097 | VCT.95 B-M16 | 95 | 46 | 32 | - | 21 | - | M16 | 22 | 100 | 109 |

"Max limit Tightening torque" means the max torque value at which the metal insert, in normal conditions of use, is perfectly and strongly anchored to the plastic material.