

GN 913.3

EXTENDED RANGE

Grub screws



Material


Black-oxide steel, class 5.8 (tensile strength 500 N/mm²), hexagon socket head.

Bolt

- Version **KU**: acetal resin based (POM) technopolymer, natural colour.
- Version **MS**: brass.

Features and applications

GN 913.3 grub screws, thanks to the brass or technopolymer bolt, avoid to scratch or damage the contact surface.

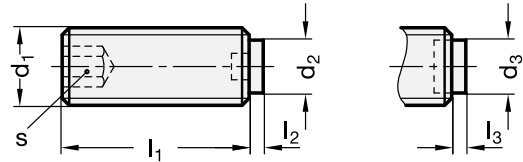

Standard Elements	Main dimensions					\triangle
Description	d1	d2	l1	l2	s	g
GN 913.3-M4-4-MS	M4	2.5	4	0.5	2	1
GN 913.3-M4-5-MS	M4	2.5	5	0.5	2	1
GN 913.3-M4-6-MS	M4	2.5	6	0.5	2	1
GN 913.3-M4-8-MS	M4	2.5	8	0.5	2	1
GN 913.3-M4-10-MS	M4	2.5	10	0.5	2	1
GN 913.3-M4-12-MS	M4	2.5	12	0.5	2	1
GN 913.3-M4-16-MS	M4	2.5	16	0.5	2	1
GN 913.3-M4-20-MS	M4	2.5	20	0.5	2	1
GN 913.3-M5-5-MS	M5	3	4	0.5	2.5	1
GN 913.3-M5-6-MS	M5	3	6	0.5	2.5	1
GN 913.3-M5-8-MS	M5	3	8	0.5	2.5	1
GN 913.3-M5-10-MS	M5	3	10	0.5	2.5	1
GN 913.3-M5-12-MS	M5	3	12	0.5	2.5	1
GN 913.3-M5-16-MS	M5	3	16	0.5	2.5	2
GN 913.3-M5-20-MS	M5	3	20	0.5	2.5	2
GN 913.3-M5-25-MS	M5	3	25	0.5	2.5	3
GN 913.3-M6-6-MS	M6	4	6	1	3	1
GN 913.3-M6-8-MS	M6	4	8	1	3	1
GN 913.3-M6-10-MS	M6	4	10	1	3	1
GN 913.3-M6-12-MS	M6	4	12	1	3	2
GN 913.3-M6-16-MS	M6	4	16	1	3	2
GN 913.3-M6-20-MS	M6	4	20	1	3	3
GN 913.3-M6-25-MS	M6	4	25	1	3	4
GN 913.3-M6-32-MS	M6	4	32	1	3	5
GN 913.3-M6-40-MS	M6	4	40	1	3	6
GN 913.3-M6-50-MS	M6	4	50	1	3	8
GN 913.3-M8-8-MS	M8	6	8	1.5	4	3
GN 913.3-M8-10-MS	M8	6	10	1.5	4	3
GN 913.3-M8-12-MS	M8	6	12	1.5	4	3
GN 913.3-M8-16-MS	M8	6	16	1.5	4	5
GN 913.3-M8-20-MS	M8	6	20	1.5	4	6
GN 913.3-M8-25-MS	M8	6	25	1.5	4	7
GN 913.3-M8-32-MS	M8	6	32	1.5	4	10
GN 913.3-M8-40-MS	M8	6	40	1.5	4	12
GN 913.3-M8-50-MS	M8	6	50	1.5	4	15
GN 913.3-M8-63-MS	M8	6	63	1.5	4	19
GN 913.3-M10-16-MS	M10	8	16	2	5	7
GN 913.3-M10-20-MS	M10	8	20	2	5	9
GN 913.3-M10-25-MS	M10	8	25	2	5	11
GN 913.3-M10-32-MS	M10	8	32	2	5	15
GN 913.3-M10-40-MS	M10	8	40	2	5	18
GN 913.3-M10-50-MS	M10	8	50	2	5	23
GN 913.3-M10-63-MS	M10	8	63	2	5	30
GN 913.3-M10-80-MS	M10	8	80	2	5	38
GN 913.3-M12-20-MS	M12	10	20	2	6	12
GN 913.3-M12-25-MS	M12	10	25	2	6	16
GN 913.3-M12-32-MS	M12	10	32	2	6	21
GN 913.3-M12-40-MS	M12	10	40	2	6	27
GN 913.3-M12-50-MS	M12	10	50	2	6	34
GN 913.3-M12-63-MS	M12	10	63	2	6	43
GN 913.3-M12-80-MS	M12	10	80	2	6	56
GN 913.3-M12-100-MS	M12	10	100	2	6	70

Standard Elements	Main dimensions					\triangle
Description	d1	d3	l1	l3	s	g
GN 913.3-M4-6-KU	M4	2	6	1	2	1
GN 913.3-M4-8-KU	M4	2	8	1	2	1
GN 913.3-M4-10-KU	M4	2	10	1	2	1
GN 913.3-M4-12-KU	M4	2	12	1	2	1
GN 913.3-M4-16-KU	M4	2	16	1	2	1
GN 913.3-M4-20-KU	M4	2	20	1	2	1
GN 913.3-M5-8-KU	M5	3	8	1	2.5	1
GN 913.3-M5-10-KU	M5	3	10	1	2.5	1
GN 913.3-M5-12-KU	M5	3	12	1	2.5	1
GN 913.3-M5-16-KU	M5	3	16	1	2.5	2
GN 913.3-M5-20-KU	M5	3	20	1	2.5	2
GN 913.3-M5-25-KU	M5	3	25	1	2.5	3
GN 913.3-M6-6-KU	M6	3.5	6	1.3	3	1
GN 913.3-M6-8-KU	M6	3.5	8	1.3	3	1
GN 913.3-M6-10-KU	M6	3.5	10	1.3	3	1
GN 913.3-M6-12-KU	M6	3.5	12	1.3	3	1
GN 913.3-M6-16-KU	M6	3.5	16	1.3	3	2
GN 913.3-M6-20-KU	M6	3.5	20	1.3	3	3
GN 913.3-M6-25-KU	M6	3.5	25	1.3	3	4
GN 913.3-M6-32-KU	M6	3.5	32	1.3	3	5
GN 913.3-M6-40-KU	M6	3.5	40	1.3	3	6
GN 913.3-M6-50-KU	M6	3.5	50	1.3	3	8
GN 913.3-M8-8-KU	M8	5	8	1.6	4	2
GN 913.3-M8-12-KU	M8	5	12	1.6	4	2
GN 913.3-M8-16-KU	M8	5	16	1.6	4	4
GN 913.3-M8-20-KU	M8	5	20	1.6	4	5
GN 913.3-M8-25-KU	M8	5	25	1.6	4	7
GN 913.3-M8-32-KU	M8	5	32	1.6	4	9
GN 913.3-M8-40-KU	M8	5	40	1.6	4	11
GN 913.3-M8-50-KU	M8	5	50	1.6	4	14
GN 913.3-M8-63-KU	M8	5	63	1.6	4	18
GN 913.3-M10-16-KU	M10	6.5	16	1.9	5	5
GN 913.3-M10-20-KU	M10	6.5	20	1.9	5	7
GN 913.3-M10-25-KU	M10	6.5	25	1.9	5	9
GN 913.3-M10-32-KU	M10	6.5	32	1.9	5	13
GN 913.3-M10-40-KU	M10	6.5	40	1.9	5	16
GN 913.3-M10-50-KU	M10	6.5	50	1.9	5	21
GN 913.3-M10-63-KU	M10	6.5	63	1.9	5	28
GN 913.3-M10-80-KU	M10	6.5	80	1.9	5	36
GN 913.3-M12-20-KU	M12	8	20	2.1	6	9
GN 913.3-M12-25-KU	M12	8	25	2.1	6	13
GN 913.3-M12-32-KU	M12	8	32	2.1	6	18
GN 913.3-M12-40-KU	M12	8	40	2.1	6	24
GN 913.3-M12-50-KU	M12	8	50	2.1	6	31
GN 913.3-M12-63-KU	M12	8	63	2.1	6	40
GN 913.3-M12-80-KU	M12	8	80	2.1	6	52
GN 913.3-M12-100-KU	M12	8	100	2.1	6	66