

## Inclined tubular handles



- **Tube**  
Aluminium, wall thickness 1.5 mm.
- **Handle shanks**  
Die-cast zinc alloy, RAL 9005 black colour, matte finish, epoxy resin coating, fitted to the tube by means of a screw.
- **Tube end caps**  
Polyamide based (PA) technopolymer.
- **Finish**
  - Version **SW**:  
Tube / Handle shanks: RAL 9005 black colour, matte finish, epoxy resin coating.
  - Version **EL**:  
Tube: anodised, natural colour.  
Handle shanks: RAL 9005 black colour, matte finish, epoxy resin coating.
  - Version **ES**:  
Tube: anodised, natural colour, matte finish.  
Handle shanks: RAL 9006 silver colour, matte finish, epoxy resin coating.
- **Assembly**
  - Type **A**: back mounting, tapped blind holes.
  - Type **B**: front mounting, through holes for cylindrical-head screws with hexagon socket, DIN 912-M6.


### Special executions on request

(For sufficient quantities)  
Different lengths.

### Features and applications

GN 333 inclined tubular handles are characterised by a high stability thanks to the assembly of the handle shanks to the tube by means of two screws.

These handles are typically used on turning or rolling doors for machines and equipment.

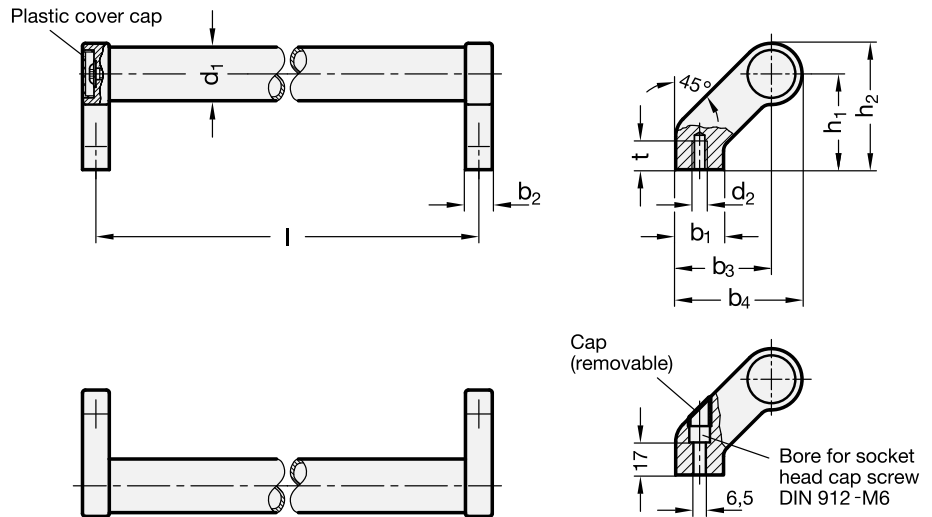

Standard Elements	Main dimensions							Mounting holes			△△
Description	l ±0.25	h1	h2	b2	b3	b4	d1	d2	t min.	b1	g
GN 333-28-200-A-*	200	50	66	14	50	66	28	M8	15	25	432
GN 333-28-250-A-*	250	50	66	14	50	66	28	M8	15	25	455
GN 333-28-300-A-*	300	50	66	14	50	66	28	M8	15	25	470
GN 333-28-350-A-*	350	50	66	14	50	66	28	M8	15	25	490
GN 333-28-400-A-*	400	50	66	14	50	66	28	M8	15	25	500
GN 333-28-500-A-*	500	50	66	14	50	66	28	M8	15	25	535
GN 333-28-600-A-*	600	50	66	14	50	66	28	M8	15	25	620
GN 333-30-200-A-*	200	51	68	17	51	68	30	M8	15	25	430
GN 333-30-300-A-*	300	51	68	17	51	68	30	M8	15	25	480
GN 333-30-350-A-*	350	51	68	17	51	68	30	M8	15	25	520
GN 333-30-400-A-*	400	51	68	17	51	68	30	M8	15	25	650
GN 333-30-500-A-*	500	51	68	17	51	68	30	M8	15	25	680
GN 333-30-600-A-*	600	51	68	17	51	68	30	M8	15	25	790
GN 333-30-1000-A-*	1000	51	68	17	51	68	30	M8	15	25	920
GN 333-28-200-B-*	200	50	66	14	50	66	28	-	-	25	420
GN 333-28-250-B-*	250	50	66	14	50	66	28	-	-	25	450
GN 333-28-300-B-*	300	50	66	14	50	66	28	-	-	25	470
GN 333-28-350-B-*	350	50	66	14	50	66	28	-	-	25	480
GN 333-28-400-B-*	400	50	66	14	50	66	28	-	-	25	478
GN 333-28-500-B-*	500	50	66	14	50	66	28	-	-	25	520
GN 333-28-600-B-*	600	50	66	14	50	66	28	-	-	25	590

\* Complete the description of the standard item needed by adding the index of the finish of the tube and the handle shanks: SW (black/black), EL (anodised/black) or ES (anodised/silver).