

## T-angle linear actuator connectors



**•Material**

AISI CF-8 stainless steel **NI**, matte polished.

**•Slide bush**

Polyamide.

**•Clamping screw**

Identification no. **2**: with AISI 304 stainless steel-clamping screw DIN 912 and nut DIN 985.

**•Assembly**

The standard clamping bolts are socket cap screws DIN 912, supplied assembled. They can be replaced by clamping kits GN 911 (description see table of dimensions).


**Features and applications**

T-angle linear actuator connectors GN 191.1-NI are normally supplied only in connection with a **mounted** linear actuator and for function control.

By means of the clamping screw on the guide bore  $d_1$  (mechanically machined) the movement can either be set or the linear actuator connector can be clamped (after setting of final adjustment).

**Accessories**

- Construction tubings GN 990 (see page 109ff.).
- Linear actuators GN 291 (see page 119).
- Linear actuators GN 292 (see page 124).
- Clamping kits GN 911 (clamping handles GN 300.1 with distance bushing) see page 116.

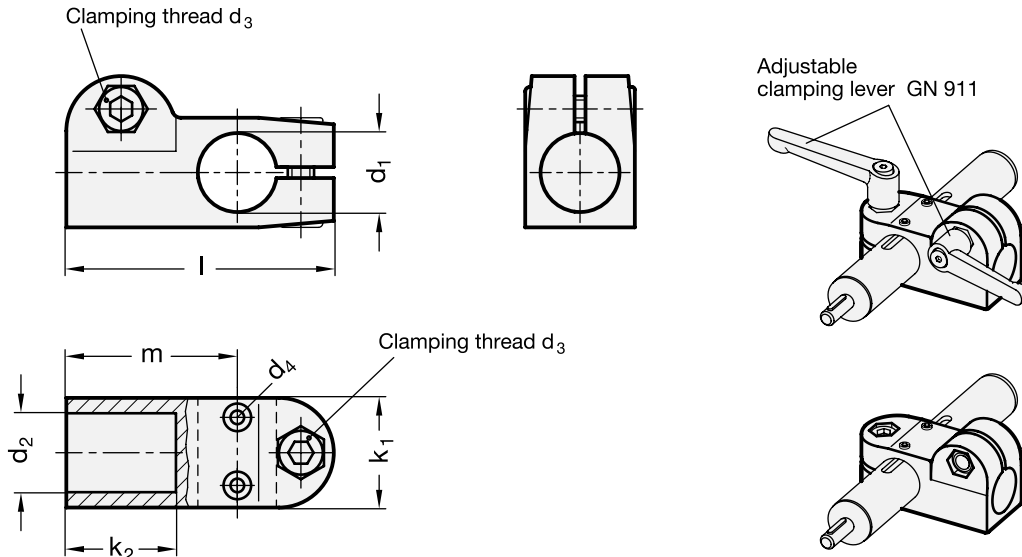

Standard Elements	Main dimensions								Clamping kits for $d_3$	g
	$d_1$ with slider bush	$d_2$ without slider bush	$d_3$	$d_4$ Mounting screw on the follower	$k_1$	$k_2$	$l$	$m$		
GN 191.1-G18-B18-2-NI	G18	B18	M6	M3	25	25	61	39	GN 911-M6-22	77