

GN 880.1

Connector pieces



- **Connecting nut**
Brass, with hose liner.
- **L bend**
Copper, 45° / 90°.
- **O-ring**
NBR (Perbunan) synthetic rubber.
- **Drain hose**
Version **T**: PVC, transparent.
- **Hose clip**
Zinc-plated steel.
- **Plug**
Plastic, LD-PE.
- **Standard versions available**
 - Type **A**: Connector straight.
 - Type **B**: Connector 45°.
 - Type **C**: Connector 90°.

Accessories on request

- other hose lengths.
- Drain hose with inside webbing (Nylon).

Features and applications

Connector pieces GN 880.1 are required when using oil drain valves GN 880. Screwing on the connector piece will activate the valve plate of the oil drain valve, allowing the oil to flow through the hose into a pan held ready. The plug prevents remaining oil from dripping out after discharging.

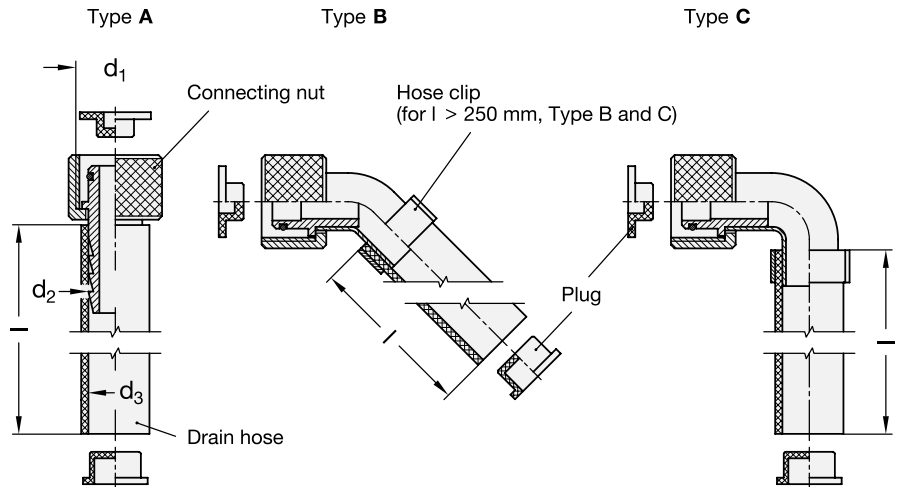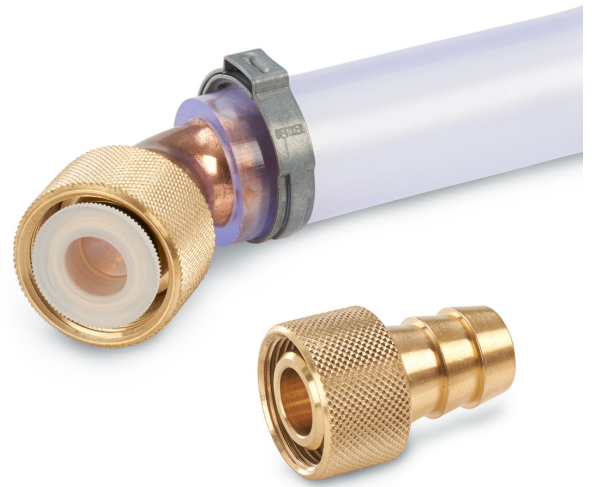

Standard Elements	Main dimensions						⚖
Description	Size	d1*	l	d2	d3	g	
GN 880.1-22-A	22	M22x1.5	-	15	-	58	
GN 880.1-22-B	22	M22x1.5	-	15	-	58	
GN 880.1-22-C	22	M22x1.5	-	15	-	61	
GN 880.1-26-A	26	M26x1.5	-	20	-	88	
GN 880.1-26-B	26	M26x1.5	-	20	-	88	
GN 880.1-26-C	26	M26x1.5	-	20	-	89	
GN 880.1-22-A-250-T	22	M22x1.5	250	15	14	97	
GN 880.1-22-B-250-T	22	M22x1.5	250	15	14	97	
GN 880.1-22-C-250-T	22	M22x1.5	250	15	14	97	
GN 880.1-22-A-500-T	22	M22x1.5	500	15	14	140	
GN 880.1-22-B-500-T	22	M22x1.5	500	15	14	140	
GN 880.1-22-C-500-T	22	M22x1.5	500	15	14	140	
GN 880.1-22-A-1000-T	22	M22x1.5	1000	15	14	220	
GN 880.1-22-B-1000-T	22	M22x1.5	1000	15	14	220	
GN 880.1-22-C-1000-T	22	M22x1.5	1000	15	14	220	
GN 880.1-26-A-250-T	26	M26x1.5	250	20	19	153	
GN 880.1-26-B-250-T	26	M26x1.5	250	20	19	153	
GN 880.1-26-C-250-T	26	M26x1.5	250	20	19	153	
GN 880.1-26-A-500-T	26	M26x1.5	500	20	19	230	
GN 880.1-26-B-500-T	26	M26x1.5	500	20	19	230	
GN 880.1-26-C-500-T	26	M26x1.5	500	20	19	230	
GN 880.1-26-A-1000-T	26	M26x1.5	1000	20	19	390	
GN 880.1-26-B-1000-T	26	M26x1.5	1000	20	19	390	
GN 880.1-26-C-1000-T	26	M26x1.5	1000	20	19	390	

* Connection thread GN 880 (see page 4)