



2.1

2.2

2.3

Example of application

Assembly examples

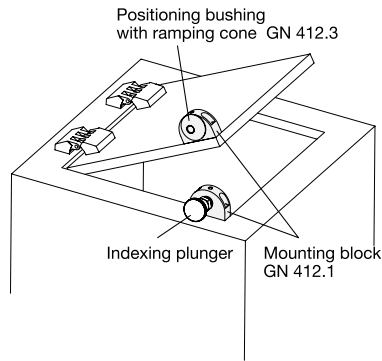

2.4

2.5

d₁	d₂ +0,1 Bore	d₃	d₄ -0,05	l₁	l₂	l₃	A/F
M 12 x 1,5	B 5,2	24	12	10	16	5	4
M 12 x 1,5	B 6,2	24	12	10	16	5	4
M 16 x 1,5	B 8,2	32	16	12	20	7	6
M 16 x 1,5	B 10,2	32	16	12	20	7	6

2.6

2.7

Specification

- Steel
 - hardened
 - blackened
- RoHS compliant

Information

Positioning bushings with ramping cone GN 412.3 are used in connection with bolts of indexing plungers.

The threads are adapted to the mounting blocks GN 412.1 and GN 612.1.

see also...

- *Mounting blocks GN 412.1* → Page 452
- *Mounting blocks GN 612.1* → Page 453
- *Flat hexagonal nuts GN 909* → Page 451

2.8

2.9

How to order

GN412.3-M16x1,5-B8,2

- | | |
|---|----------------|
| 1 | d ₁ |
| 2 | d ₂ |