



Plunger retracted

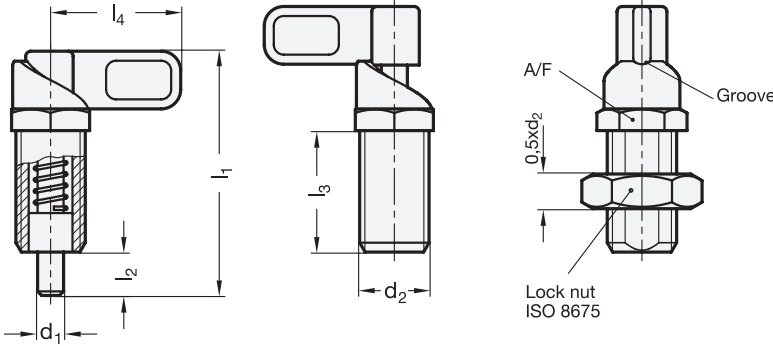

- 3 Type**
A without lock nut
AK with lock nut

Mounting information



d ₁ Plunger ^{-0,05} Bore ^{+0,1} / _{-0,05}	d ₂	l ₁	l ₂	l ₃	l ₄	A/F	Spring load in N ≈	
							initial	end
4	M 12 x 1,5	48	8	25	25	13	8	22
5	M 12 x 1,5	48	8	25	25	13	8	22
6	M 12 x 1,5	48	8	25	25	13	8	22
6	M 16 x 1,5	56,5	10	28	30	18	11	30
8	M 16 x 1,5	56,5	10	28	30	18	11	30
8	M 20 x 1,5	69,5	12	36	37	22	20	56
10	M 16 x 1,5	56,5	10	28	30	18	11	30
10	M 20 x 1,5	69,5	12	36	37	22	20	56
12	M 20 x 1,5	69,5	12	36	37	22	20	56

Specification

- Threaded body
Zinc die casting
- corrosion-resistant
 ZNDG Pass nano®-coating
- anthracite
- Plunger
Steel
zinc plated, blue passivated
- Lever
Plastic (Polyamide PA)
- black, matt
- not removable
- *Plastic characteristics* → Page 1141
- **RoHS compliant**

Information

Cam action indexing plungers GN 612.8 are used in cases where the locking pin must not protrude all the time. By rotating the lock through 180° the locking pin withdraws itself. The notch allows safe positioning.

These cam action indexing plungers made of zinc die casting are very reasonably priced design versions.

see also...

- *Range of cam action indexing plungers* → Page 412
- *Mounting blocks GN 612.1* → Page 453
- *Mounting blocks GN 412.1* → Page 452
- *Distance bushings GN 609* → Page 450
- *Hexagonal nuts GN 909* → Page 451

How to order	1	d ₁
	2	d ₂
GN612.8-8-M16x1,5-A	3	Type