


GN 302

Adjustable handles

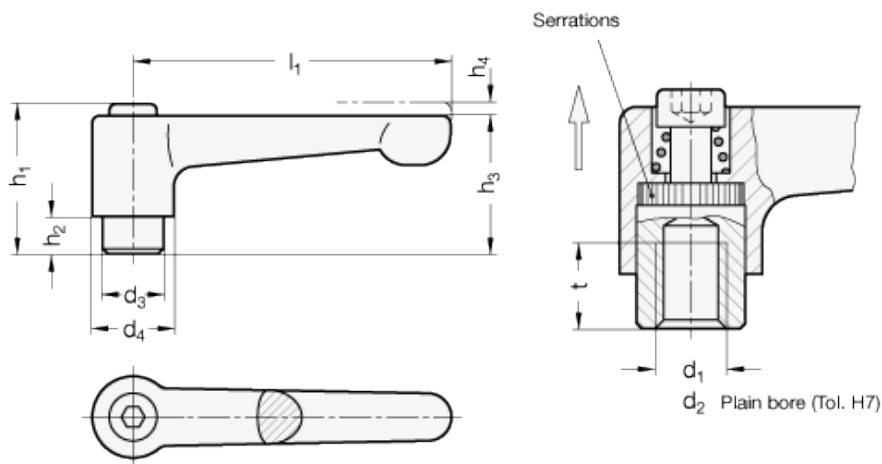

technical informations

Lever body

Zinc alloy die-cast.

Colour

RAL 9005 black SW, RAL 2004 orange OS, RAL 3000 red RS,
RAL 9006 silver SR, matte finish, epoxy resin coating.

Clamping element

Black-oxide steel with threaded hole and toothed element for coupling to the lever body, treated steel retaining screw and return spring.

Special executions on request (For sufficient quantities)

Adjustable handles GN 302.1 with stainless steel insert.

Features and applications

Particularly suitable when the lever turning angle is limited owing to lack of space. Adjustable hand levers GN 302 have a straight lever, not inclined, being parallel to the clamping space. For some applications this presents an advantage due for limits of space or for optical reasons.

Instructions of use

For clamping, lift the lever to disengage the clamping device toothing and bring it back to start position. By releasing the lever, the return spring automatically engages the toothing.

If the lever cannot make a 360° rotation, the clamping element can be easily screwed by means of the hexagon socket front head screw (after having disengaged the lever).

SW RAL 9005 OS RAL 2004 RS RAL 3000 SR RAL 9006

Standard Elements	Main dimensions							Mounting hole			Weight g
	Description	l ₁	h ₁	h ₂	h ₃	h ₄	d ₃	d ₄	d _{2H7}	d ₁	
GN 302-30-B5-*	30	24.5	4	22	3.5	10	13	5	-	9	20
GN 302-30-B6-*	30	24.5	4	22	3.5	10	13	6	-	9	20
GN 302-30-M3-*	30	24.5	4	22	3.5	10	13	-	M3	7	20
GN 302-30-M4-*	30	24.5	4	22	3.5	10	13	-	M4	9	20
GN 302-30-M5-*	30	24.5	4	22	3.5	10	13	-	M5	9	20
GN 302-30-M6-*	30	24.5	4	22	3.5	10	13	-	M6	9	20
GN 302-45-B5-*	45	24.5	4	22	3.5	10	13	5	-	9	31
GN 302-45-B6-*	45	24.5	4	22	3.5	10	13	6	-	9	30
GN 302-45-M4-*	45	24.5	4	22	3.5	10	13	-	M4	9	32
GN 302-45-M5-*	45	24.5	4	22	3.5	10	13	-	M5	9	32
GN 302-45-M6-*	45	24.5	4	22	3.5	10	13	-	M6	9	31
GN 302-63-B8-*	63	31	6.5	28.5	4	13.5	17.5	8	-	11	72
GN 302-63-M6-*	63	31	6.5	28.5	4	13.5	17.5	-	M6	11	74
GN 302-63-M8-*	63	31	6.5	28.5	4	13.5	17.5	-	M8	11	72
GN 302-78-B8-*	78	36	8	34	4	16	21	8	-	14	120
GN 302-78-B10-*	78	36	8	34	4	16	21	10	-	14	116
GN 302-78-M8-*	78	36	8	34	4	16	21	-	M8	14	121
GN 302-78-M10-*	78	36	8	34	4	16	21	-	M10	14	117



ELESA-GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE