


GN 99.2 Adjustable clamping levers

PUSH to disengage

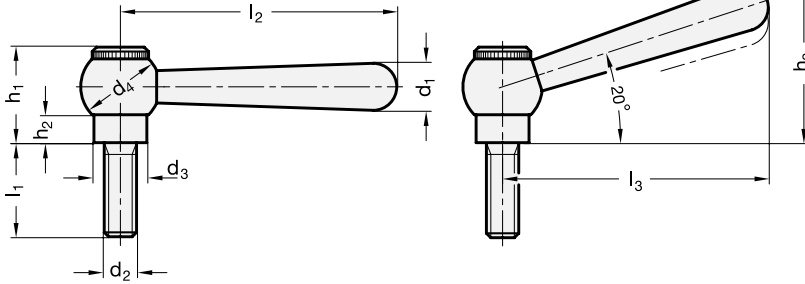

- 4 Type**
M Straight lever
N Angled lever

1 **2** **3**

d ₁	d ₂	l ₁							d ₃	d ₄	h ₁	h ₂	h ₃ ≈	l ₂	l ₃ ≈
10	M 8	20	25	32	40	50	63	13,5	20	25	8	39,5	63	60	
13	M 10	20	25	32	40	50	63	16	25	29	8	49,5	80	76	
16	M 12	25	32	40	50	63	80	19	28	33,5	10,5	60,5	100	95	

Specification

- Steel blackened
Threaded stud
Tensile strength class 5.8 (500 N/mm²)
- RoHS compliant

Information

Adjustable clamping levers GN 99.2 are known for their small dimensions. They are for use in applications where either the clamping range is limited or where a specific lever position is required. The serrated bore in the spherical hub is fitted with a threaded bolt insert which engages in the hub with its own serrations.

By depressing the clamping lever the serrations are disengaged freeing it for re-positioning in the most convenient position. When releasing the lever the serrations will re-engage automatically.

Should a rotation of 360° not be possible the insert can be slightly screwed in (after the lever has been disengaged) by means of the slotted knurled screw.

How to order	
1	d ₁
2	d ₂
3	l ₁
4	Type

GN 99.2-13-M10-40-N