

3 Type

- A with flange for surface mounting
- B with female thread
- C with male thread

d	r	b	l ₁ ≈	l ₂	l ₃ min.	l ₄
17	40	10	5,5	16,5	21,5	11
17	55	10	5,5	16,5	21,5	11

Specification

- Latch
 - Zinc die casting plastic coated
 - black, RAL 9005, textured finish
 - red, RAL 3000, textured finish
- Indexing mechanism
 - Type A
 - Zinc die casting / Plastic
 - Type B / Type C
 - Steel / Plastic
 - Steel parts zinc plated, blue passivated
- Fastening flange
 - Zinc die casting plastic coated
 - black, matt
- RoHS compliant



Information


Stop locks GN 702 type C have the same connecting dimensions as the mini locks GN 115.1. The mounting bores are to be selected and asset accordingly.

In standard production, the **mounting bore holes** are usually made by punching or with laser.

The sheet metal punch GN 123 → Page 876 is recommended for small series and sheet metal with a thickness of below 2 mm.

The mounting bore holes can also be made by drilling / milling.

Mounting holes

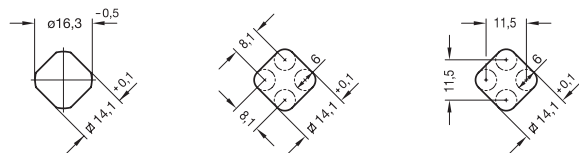

How to order

GN 702-17-40-C-SW

1	d
2	r
3	Type
4	Colour

2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8 2.9