



Version ND

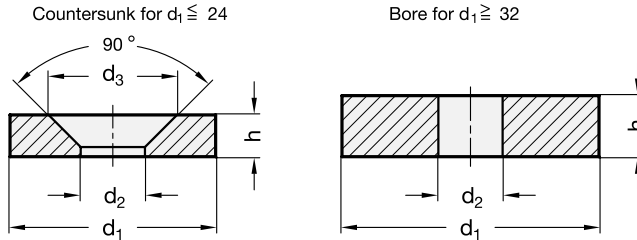

Version SC

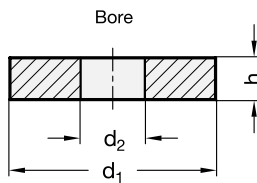

d ₁	Material of the magnet SC		Material of the magnet ND			Nominal adhesive forces in N		Packaging units
	d ₂ ±0,1	h ±0,1	d ₂ ±0,1	h ±0,1	d ₃ +0,5	SC Sm Co	ND NdFeB	
12 ±0,1	-	-	3,5	3	6,6	-	18	20
15 ±0,1	8	3,5	4,5	3,5	9,3	23	29	20
18 ±0,1	8	4	4,5	4	9,3	31	41	10
24 ±0,1	11,5	4	5,5	4	11,5	51	66	10
32 ±0,1	10	4	10,5	2	-	67	42	5
38 ±0,1	-	-	12	4	-	-	110	2
48 ±0,2	-	-	15	5	-	-	165	1
56 ±0,2	-	-	15	6	-	-	230	1

Specification

- Materials of the magnet:
 - SmCo
Samarium, cobalt
temperature resistant up to 200 °C
 - NdFeB
Neodymium, iron, boron
temperature resistant up to 80 °C

• RoHS compliant

On request

- made of hard ferrite (HF)

1

Information

Raw magnets GN 55.1 are unshielded disc-shaped (annular) magnets.

SC

Owing to their vast range of different magnet materials and sizes, they are suitable for virtually universal use. They are mostly attached by gluing.

ND

When used without air gap, individual raw magnets always have lower adhesive forces than a magnet system in which shielding and magnetic return enormously intensify the force acting at the adhesion surface. Depending on the air gap between magnet and mating component, individual raw magnets - unlike magnet systems - can have substantially higher adhesive forces.

In the event that no suitable retaining magnets / magnet systems are available, raw magnets may be used in combination with appropriate holding constructions to build up highly specific magnet systems.

see also...

- More information to retaining magnets → Main Catalogue Page 1094

How to order

GN 55.1-ND-38-12-4

1 Material of the magnet

2 d₁

3 d₂

4 h