

¹ $d_1 -0,5$	² $l_1 \pm 2$	a_1	a_2	d_2	h_1	$h_2 -0,1$	l_2
30	100	18	9	32	34,5	14,5	106
30	200	18	9	32	34,5	14,5	206
30	300	18	9	32	34,5	14,5	306
30	400	18	9	32	34,5	14,5	406
30	500	18	9	32	34,5	14,5	506

Specification



- Tube extrusion
Aluminium
- End caps
Zinc die casting
- Tube extrusion / End caps
plastic coated
black, RAL 9005, textured finish ● **SW**
- Self tapping countersunk screws
DIN 7500-1, type M with Torx®
- RoHS compliant

Accessory

- Four DIN 7500-1 countersunk screws are included.

On request


- Tube extrusion,
anodized, natural colour
- End caps, plastic coated
silver, textured finish

Information

The tube extrusion for edge handles GN 481 is formed in such a way that two countersunk self tapping screws are used to hold the end caps in position.

If an edge handle for a cabinet of non-standard length is required, a standard extrusion can simply be shortened to fit.

How to order	1	d_1
¹ ² ³ GN 481-30-300-SW	2	l_1
	3	Finish

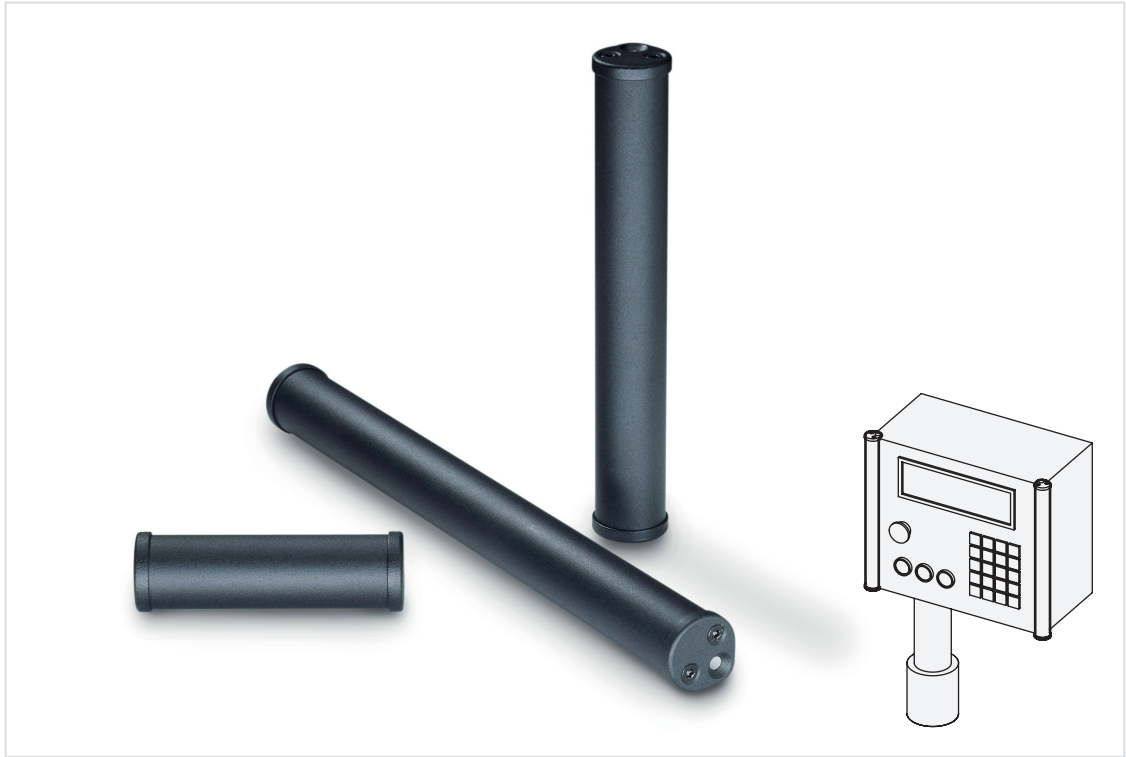

1.1


1.2

1.3


1.4

1.5

Mounting information

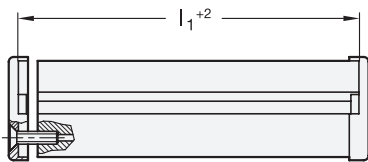


Edge of the cabinet



In order to align the edge handle with the edge of the cabinet (tolerance $l_1 + 2$ mm), the end caps should, to start with, only be loosely fitted.

The mounting is carried out in two steps as follows:

1. Fit the end caps firmly to the cabinet.
2. Fix the extrusion axially by using the countersunk screws.

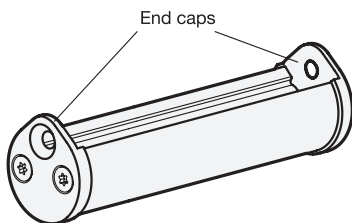

1.6

1.7

1.8

1.9

