




 Inox
Stainless
Steel

4 Type

- A** without sealing
B with sealing

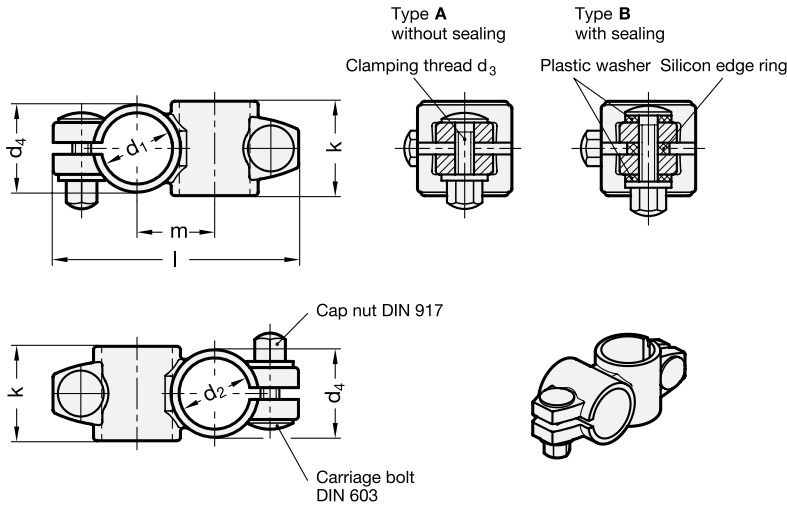

1

2

3

d_1 Bore B	d_2 Bore B	k Clamping length	d_3 Clamping thread	d_4	Length l	m
B 30	B 30	40	M 8	37	104	33

Specification

- Stainless Steel
 - AISI CF-8
 - matt shot-blasted
- Clamping bores mechanically machined
- Carriage bolt DIN 603 Stainless Steel A2
- Cap nuts DIN 917 Stainless Steel A2
- Sealings
 - Washers
Plastic (Polyacetal POM)
 - Edge ring
Silicon, 40 ... 60 Shore A
- Stainless Steel characteristics → Page 334
- RoHS-konform

Information

The clamping bores of the Stainless Steel-Two-way connector clamps GN 132.5 are mechanically machined and designed for construction tubings GN 990 or DIN 2391, DIN 2395 and DIN 2462 respectively.

The shape of the clamping screws / nuts prevents the formation of wetness due to dammed-up water. The designs with sealing (Type B) also seals bore holes and threads.

see also...

- Stainless Steel-Construction tubes GN 990
→ Main Catalogue Page 1027
- Stainless Steel - Two-way connector clamps GN 131
(Bore-Ø B12 ... B20)
→ Main Catalogue Page 976
- Stainless Steel-Flanged connector clamps GN 146.5 → Page 288
- Stainless Steel-Base plate connector clamps GN 163.5 → Page 289
- Stainless Steel-T-angle connector clamps GN 192.5 → Page 290

How to order

1	d_1
2	d_2
3	k
4	Type

GN 132.5-B30-B30-40-A