


Application example of different clamping pads with O-ring

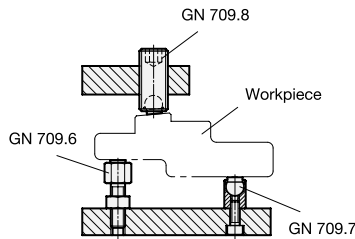

3 Type

- B** Ball steel, smooth contact face
- R** Ball steel, serrated contact face
- K** Ball plastic, smooth contact face

1

2

d ₁	l ₁ ±0,13			d ₂	d ₃ Ball-Ø	A/F	Static load max. in kN		
							Type B	Type R	Type K
M 12	25	35	50	6	7	6	12	6	2
M 16	25	35	50	8,5	10	8	20	9	4

Specification

- Steel
 - tempered
 - Tensile strength class 10.9
- Ball
 - Steel hardened (54+2 HRC)
 - Plastic (Polyacetal POM)
- O-Ring
 - Rubber NBR (Perbunan)
- **RoHS compliant**

Information

Clamping pads GN 709.8 are also used in jig and fixture construction, for example for clamping workpieces, as movable bearing surface or as stop. The swivel-mounted ball compensates uneven and non-parallel contact surfaces by as much as 10°. It is also secured against further twisting.

The O-ring holds the ball in position and prevents dirt from penetrating, resulting in a long service life and constant mobility.

see also...

- Clamping pads GN 709.6 (adjustable, with O-Ring) → Page 158
- Clamping pads GN 709.7 (with O-Ring) → Page 159
- Clamping pads GN 709.1 / GN 709.15 (with screw)
 - Main Catalogue Page 588
- Clamping pads GN 709.2 / GN 709.25 (with internal thread)
 - Main Catalogue Page 589
- Clamping pads GN 709.3 / GN 709.35 (adjustable)
 - Main Catalogue Page 586

How to order

GN 709.8-M12-25-B

1	d ₁
2	l ₁
3	Type