


1 Type

Operation

- DK** with triangular spindle (DK7)
- VK7** with square spindle A/F7
- VK8** with square spindle A/F8
- SCH** with slot
- VDE** with double bit

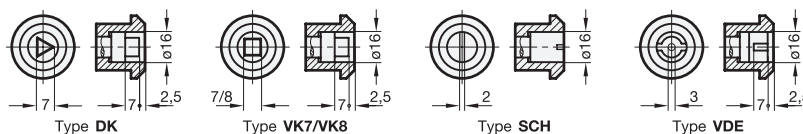

2

Latch distance A											d	h
4	8	13	16	20	24	28	32	36	40	45	28	4
6	10	14	18	22	26	30	34	38	42	50	28	4

Specification

- Lock housing
Zinc die casting
- Locating ring
- chrome plated (Standard) —
- plastic coated
black, RAL 9005, textured finish ● **SW**
- All other parts
Steel zinc plated, blue passivated
- **RoHS compliant**

Accessory

- Key GN 119.2 → Page XYZ

3

Information

Latches GN 115 lock by a turning operation limited to 90° which moves the locking behind the door frame. The bevels of the latch ease the closing of the door.

Latches with 22 different cranks cover a latch distance A from 4 to 50 mm.

Latches GN 115 are supplied with loosely enclosed locking.

see also...

- Construction and assembly instructions → Page XYZ
- Latches GN 115 (Operation with operating elements) → Page XYZ
- Stainless Steel-Latches GN 115 → Page XYZ

How to order (chrome plated locating ring)

GN 115-VK8-20

- 1** Type
- 2** Latch distance A

How to order (black locating ring)

GN 115-SCH-32-SW

- 1** Type
- 2** Latch distance A
- 3** Finish