

# HRT. | Oil level indicators

push-fit, technopolymer



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- RH

## MATERIAL

Polyamide based (PA) technopolymer, black colour, matte finish.

## WINDOW

Transparent polyamide based (PA-T/AR) technopolymer.

## CONTRAST SCREEN

White lacquered aluminium with red level line.

## PACKING RING

NBR synthetic rubber O-Ring.

## MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

## FEATURES AND APPLICATIONS

The push-fit assembly is guaranteed by optimised ribbings.

Sealing is guaranteed by the O-ring.

HRT. oil level indicators push-fit are particularly suitable for assembly on reservoirs with limited pressure.

## NOTE


For use with other fluids with special additives, please contact ELESa Sales Department.

## ASSEMBLY INSTRUCTIONS

Chamfer hole 1x45° and grease slightly the outside surface of the O-ring to make assembly easier.



ELESa Original design

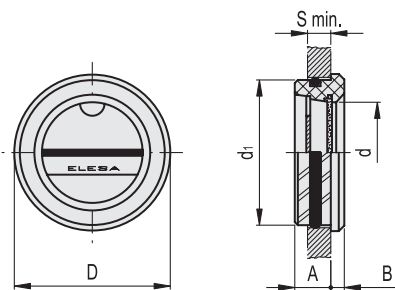

| Code  | Description | d1 | A    | B   | D  | d    | S min | Mounting |    |
|-------|-------------|----|------|-----|----|------|-------|----------|----|
|       |             |    |      |     |    |      |       | hole     | ⚖  |
|       |             |    |      |     |    |      |       | d1 H11   |    |
| 10751 | HRT.15-26   | 26 | 9    | 4.5 | 28 | 14.5 | 6     | 26       | 6  |
| 10756 | HRT.20-32   | 32 | 10.5 | 4.5 | 36 | 18   | 8     | 32       | 10 |
| 10761 | HRT.25-38   | 38 | 11   | 5   | 42 | 23   | 8     | 38       | 12 |
| 10766 | HRT.40-60   | 60 | 11   | 5.5 | 64 | 40   | 9     | 60       | 29 |

Accessories for hydraulics

1200

