


3 Type

- A** with cylinder head screw DIN 912
- B** with adjustable clamping lever GN 300.1

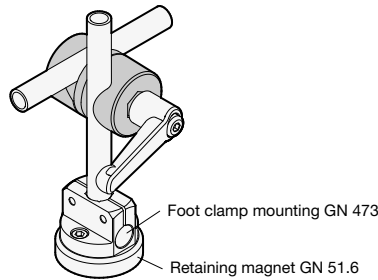

1

2

d₁	d₂ Clamping-Ø	d₃	l₁	l₂	l₃	l₄	l₅	m
28	8	M 6	33	35	45	14	5	13
32	10	M 8	45	45	63	20	5	15
36	12	M 8	47	45	63	21	5	17
46	16	M 10	57	55	78	27	6	22

Specification

- Aluminium
 - plain, matte tumbled finish ● **MT**
 - plastic coated black, RAL 9005, textured finish ● **SW**
- Socket cap screws DIN 912
Stainless Steel AISI 304
- Hexagon nuts DIN 934
Stainless Steel AISI 304
- Adjustable clamping lever GN 300.1
 - Zinc die casting plastic coated silver, RAL 9006, textured finish
 - Insert / Distance bushing
Stainless Steel AISI 303
- *Stainless Steel characteristics* → Page 334
- **RoHS compliant**

4

Information

Twistable two-way clamp mountings GN 490 clamp the rods or tubes via a prism, allowing a greater Ø tolerance to be bridged. The pressure spring makes clamping and releasing easier.

see also...

- *Two-way clamp mountings GN 474* → Main Catalogue Page 1078
- *Twistable two-way clamp mountings GN 475* → Page 295
- *Foot clamp mountings GN 473* → Main Catalogue Page 1076

How to order

GN 490-32-10-A-SW

- 1** **d₁**
- 2** **d₂**
- 3** **Type**
- 4** **Finish**