




Range extended!



ROSTFREI
Inox
Stainless
Steel

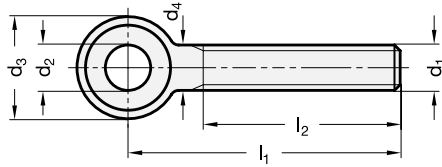

Cylinder head shoulder bolt GN 732 used as bearing pin



d₁	l₁					l₂	d₂ E8	d₃ -0,4	s -0,2	d₄
M 6	50	60	70	80	40	6	12	8	6	
M 8	50	-	-	-	40	8	16	10	8	
M 8	60	70	80	100	45	8	16	10	8	
M 10	50	-	-	-	38	10	20	12	10	
M 10	60	-	-	-	46	10	20	12	10	
M 10	70	80	100	120	50	10	20	12	10	
M 12	50	-	-	-	35	12	25	14	12	
M 12	60	-	-	-	42	12	25	14	12	
M 12	70	-	-	-	52	12	25	14	12	
M 12	80	100	120	130	60	12	25	14	12	
M 16	70	-	-	-	49	16	32	18	16	
M 16	80	-	-	-	59	16	32	18	16	
M 16	100	-	-	-	77	16	32	18	16	
M 16	120	140	160	-	80	16	32	18	16	
M 20	100	-	-	-	75	20	40	22	20	
M 20	120	-	-	-	95	20	40	22	20	
M 20	140	160	-	-	100	20	40	22	20	
M 24*	160	240	-	-	120	25	50	28	24	

* This size is not available in Stainless Steel (NI).

Specification

- Steel —
 - Tensile strength class 5.8 (500 N/mm²)
 - turned
 - blackened
- Stainless Steel AISI 303 **NI**
 - turned
 - matt shot-blasted
- ISO-Fundamental Tolerances → Page 323
- Stainless Steel characteristics → Page 334
- RoHS compliant

Information

Swing bolts GN 1524 offer a longer threaded bolt contrary to DIN 444. For stocking purposes cylinder head shoulder bolts GN 732 can be used for the sizes M8, M10 and M12.

see also...

- Cylinder head shoulder bolts GN 732 → Main Catalogue Page 529

Steel-Swing bolts GN 1524-M12-100	1	d ₁
	2	l ₁

Stainless Steel-Swing bolts GN 1524-M20-160-NI	1	d ₁
	2	l ₁
	3	Material