


Application example

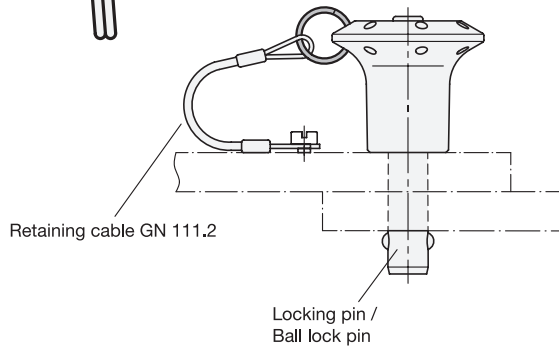

ROSTFREI
Inox
Stainless
Steel

3.1

3.2

3.3

3.4



d ₁	d ₂	Static load in N	suitable for ball lock pins and locking pins
14 *	1	50	* GN 113.1, GN 113.3, GN 113.4, GN 113.7, GN 113.8, GN 113.9, GN 113.10, GN 214.2, GN 214.3, GN 214.6 for pins Ø 5, Ø 6, Ø 8 and GN 113.5, GN 113.6, GN 114.2, GN 114.3, GN 114.6, GN 124.1, GN 124.2 for all pins ** GN 113.1, GN 113.3, GN 113.4, GN 113.7, GN 113.8, GN 113.9, GN 113.10, GN 214.2, GN 214.3, GN 214.6 for pins Ø 10, Ø 12, Ø 16, Ø 20, Ø 25
18 **	1,3	90	
24	1,5	100	
30	1,8	120	

3.5

3.6

Specification

- Stainless Steel AISI 301
 - blank
 - ground
 - zinc plated
 - black passivated
- RoHS compliant

BL

SW

Information

Stainless Steel-Key rings GN 111.3 are suitable as universal connection elements for traction cables, ball chains, retaining straps etc. where light loads are possible. The black design is visually discreet and is also used in situations where the reflections on the surface are to be minimized.

The locking pins and ball lock pins listed in the table have location holes, which the key rings are threaded into. Furthermore, Stainless Steel-Key rings can also be used to supplement retaining cables and ball chains. Thus, it is very easy to secure several elements at the same time from any loss.

The details on load-bearing capacity are guide values given without warranty.

see also...

- Ball chains GN 111 → Page 477
- Stainless Steel-Ball chains GN 111.5 → Page 477
- Stainless Steel-Retaining cables GN 111.2 → Page 478
- Spiral retaining cables GN 111.4 → Page 479

3.7

3.8

3.9

How to order	
1	d ₁
2	Finish

GN 111.3-24-SW

