



FEATURES AND APPLICATIONS




MPI-15 measuring system, made of a LCD multifunction display with integrated magnetic position sensor, combined with the magnetic band M-BAND-10 (to be ordered separately), is a complete system for the measurement of linear and angular displacement. Characterised by an extremely easy assembly, it allows precise alignment and positioning, reducing time and machining procedures to the minimum.

- Multifunction LCD with 5 function keys.
 - Absolute/ incremental mode.
 - Programmable offset function.
 - External battery power supply 1.5 VDC.
 - Buffered memory during battery substitution.
 - Accidental polarity inversion protection.
 - Magnetic sensor envelope material: anodized aluminium.
- For further information read the operating instructions.

SPECIAL EXECUTIONS ON REQUEST


The display of the special plate may be supplied with customised graphic symbols, marks or writings.

Magnetic sensor with cable length different from the standard executions shown in the table, up to 20 m maximum.

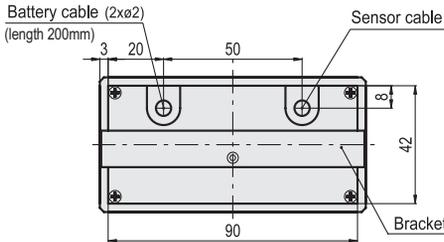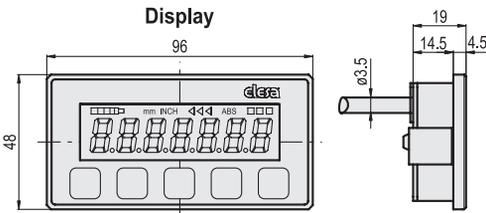

Battery case

Magnetic sensor

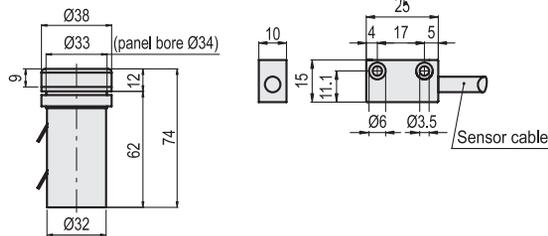

MPI-15 Technical data	
Battery life	1.5 years (C-type battery)
Resolution ⁽¹⁾	0.1 mm - 0.01 in - 0.01°
Precision ⁽²⁾	0.1 mm
Repeat accuracy ⁽³⁾	0.001 mm
Operating speed	max. 5 m/s
Self-diagnostic	battery check, sensor check, magnetic tape check
Programmable measuring unit	millimetres, inches, degrees (angles)
Working temperature	0 ÷ 50 °C
Storing temperature	-20 ÷ +70 °C
Relative humidity	Max. 95% at 25°C without condensation
Protection class	IP40 whole device IP54 front side according to IEC 529
Interference protection	IP67 magnetic sensor IEC 61000-4-2

- (1) Resolution: the smallest change in length that the system is capable of displaying.
 (2) Precision: the maximum deviation of the value measured by the system from the actual one.
 (3) Repeat accuracy: the degree of closeness between a series of measures of the same sample, when the single measurements are carried out with the conditions unchanged.

MPI-15

Code	Description	⚖️
CE.99901-#	MPI-15-#	180

Complete by specifying the sensor cable length in decimetres (10=1 meter).
 Minimum length 0.2 m, maximum length 2.0 m.
 Example: CE.99901-06 MPI-15-06 display with sensor cable length 0.6 m.

MPI-15 ASSEMBLY INSTRUCTIONS


1. Make a drilling of $42 \pm 0.2 / +0.5$ mm in the metal sheet for the installation of the display.
2. Fix the display to the panel by using the specific mounting bracket (the screw is included in the supply).
3. Make a drilling of diameter $34 \pm 0.2 / +0.5$ mm in the metal sheet for the installation of the battery case.
4. Fix the battery case to the panel by using the specific nut.
5. Fix the magnetic sensor by using M3 screws (not included in the supply). Distance between sensor and magnetic band to ensure a correct reading of the displacement: max 2.5 mm.

ACCESSORIES ON REQUEST


M-BAND-10: the magnetic band M-BAND-10 is made of two separate parts: the magnetic band and the cover strip. The magnetic band is made of a magnetic tape, a carrier strip and an adhesive tape (Fig.2). The cover strip is made of a protection strip and an adhesive tape (Fig.1).

ASSEMBLY INSTRUCTIONS M-BAND-10


1. The cover strip must be installed over the magnetic band to protect it against possible mechanical damages.
2. Clean the mounting surface carefully.
3. Remove the protective foil from the adhesive tape of the magnetic band.
4. Stick the magnetic band on the mounting surface.
5. Clean the mounting surface carefully.
6. Remove the protective foil from the adhesive tape of the magnetic band.
7. Stick the cover strip on the magnetic band.
8. In the absence of a seat for the housing of M-BAND-10, secure the ends of the cover strip to prevent unintentional peeling.

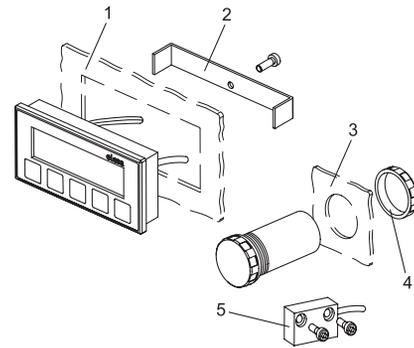

Drilling template for display



Drilling template for battery case



(remove all drilling burrs before fitting the display / battery case)

M-BAND-10 Technical data	
Precision	$\pm 40 \mu\text{m}$
Material	magnetic tape: nitrilic rubber
	carrier strip: stainless steel
	cover strip: stainless steel
Width	magnetic band: $10 \text{ mm} \pm 0.20 \text{ mm}$
	cover strip: $10 \text{ mm} \pm 0.20 \text{ mm}$
Thickness	magnetic band: $1.43 \pm 0.15 \text{ mm}$
	cover strip: 0.23 mm
Magnetic pole pitch	5 mm
Operating and storage temperature	$-40 \div +100 \text{ }^\circ\text{C}$
Linear thermic expansion factor	$17 \times 10^{-6} / \text{K}$

Fig.1

Cover strip




Fig.2

Magnetic band





Fig.3

Proper assembling



M-BAND-10

Code	Description	Band width [mm]	Band nominal thickness [mm]
CE.99903-#	M-BAND-10-#	10	1.66

Complete by specifying the length in decimetres (10=1 meter). Minimum length 0.5 m, maximum length 25 m.
Example: CE.99903-15 M-BAND-10-15 magnetic band length 1.5 m.



Position indicators