



Plunger retracted

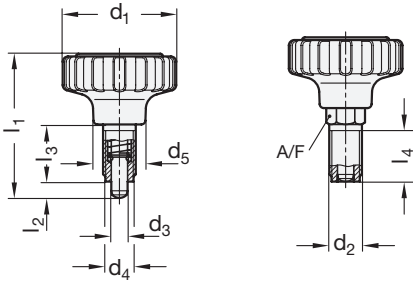

Assembly example

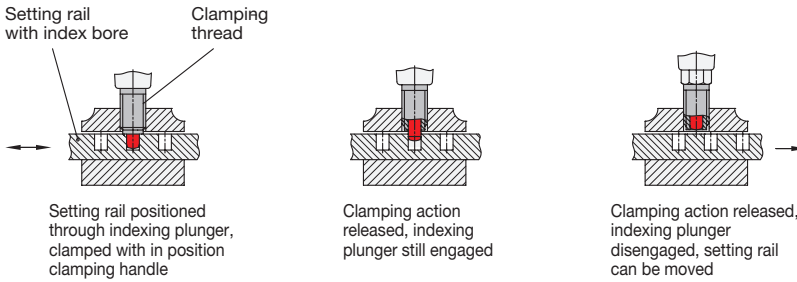

1	2	3	d₁	d₂	d₃ Bolt $-0,02$ Bore G7	d₄	d₅	l₁	l₂	l₃	l₄ min.	A/F	Spring load in N \approx	
													initial	end
			34	M 10 x 1	5	8,6	15,5	45	5	19	17	10	7	17
			42	M 12 x 1,5	6	9,9	19	53	6	21	19	12	9	24
			53	M 12 x 1,5	6	9,9	22,5	59	6	21	19	12	9	24
			53	M 16 x 1,5	8	13,9	22,5	68	8	28	26	16	11	30

Specification

- Knurled knob 7336
Plastic (Polyamide PA)
black, matt
- Cover cap
Plastic (Polyamide PA)
light grey, matt
- Fixing thread Steel
zinc plated, blue passivated
- Plunger
Stainless Steel AISI 303
- *ISO-Fundamental Tolerances* → Page 1132
- *Stainless Steel characteristics* → Page 1144
- *Plastic characteristics* → Page 1141
- **RoHS compliant**

Information

Clamping knobs with indexing plunger GN 7336.7 are used for positioning, securing and clamping adjusting elements at the same time.

The axial movement of the handle (pulling) pulls the indexing pin from the engaged position against the spring force, with the star knob at the same time remaining connected with form-lock to the clamping screw via a hexagonal element, allowing both clamping and releasing.

see also...

- *Range of indexing plungers* → Page 402
- *Knurled knobs GN 7336* → Page 314
- *Flat hexagonal nuts GN 909 / GN 909.5* → Page 451

How to order	1	d₁
GN 7336.7-42-M12x1,5-6	2	d₂
	3	d₃