



3 Type

- A Mounting with countersunk screw
- B Mounting with adhesive pad

Mounting hole pattern

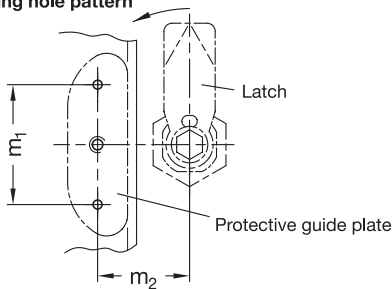

Application example



1

2

h	b ₁	b ₂	d ₁	d ₂	l ₁	l ₂	m ₁	m ₂ ±2
60	4	4,6	M 6	3	20	10	40	35

Specification

- Plastic (Polyamide PA) black, matt
- Adhesive pad (only type B) Scotch-Mount™ 4026 double-sided, with polyurethane foam backing
- *Plastic characteristics* → Page 1141
- **RoHS compliant**

4

Information

GN 120.2 protective guide plates are used in connection with door latches, using the principle of friction. They prevent the latch from causing abrasion, for example to corrosion protection layers on a door frame. They additionally prevent unintended opening, as the latches lock into a small recess in their closed position.

If the d₂ positioning tabs are not required they can easily be removed with side cutting pliers, for example.

Latches that can be used together with GN 120.2 protective guide plates:

- Latches GN 115 (not lockable) → Page 858
- Latches GN 115 (lockable) → Page 860
- Stainless Steel-Latches GN 115 → Page 862
- Latches with cabinet „U“ handles GN 115.7 → Page 866
- Latches with gripping tray GN 115.10 → New products

How to order

GN 120.2-60-4-A-SW

1	h
2	b ₁
3	Type
4	Color