



1 Type

Operation

DK with triangular spindle (DK7)

VK7 with square spindle A/F7

VK8 with square spindle A/F8

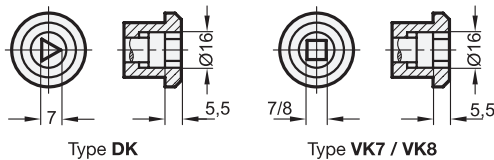

2

Latch distance **A**

4	6	8	10	13	14	16	18	20	22	24	26	28	30	32
---	---	---	----	----	----	----	----	----	----	----	----	----	----	----

Specification

- Lock housing
Zinc die casting
- Locating ring
plastic coated
black, RAL 9005, textured finish ● **SW**
- All other parts
Steel zinc plated, blue passivated
- **RoHS compliant**

Accessories

- Socket keys GN 119.2 → Page 940
- Protective caps GN 120 → Page 942
- Opening handles GN 120.1 → Page 943

3

Information

Latches GN 115.9 have a **push-to-turn** safety function. In the two end positions the spindle is locked in place by the latch. The device can be turned 90° only when the operating element is pressed down with the socket key, which releases the safety pin from the locked position. This feature protects the latch reliably from moving on its own or as the result of vibrations.

The beveled edges on the lock make closing the door easy. Latches with different cranks cover a latch distance A from 4 to 32 mm.

Latches GN 115.9 are supplied with loosely enclosed latch.

see also...

- *Construction and assembly instructions* → Page 897
- *List of latch types* → Page 892 ff.
- *Latches GN 115 (Operation with operating elements)* → New products
- *Protective guide plates GN 120.2* → Page 944

How to order

GN 115.9-DK-32-SW

1	Type
2	Latch distance A
3	Finish (Locating ring)