
Toggle clamps

Operating lever vertical, with safety hook, with vertical mounting base





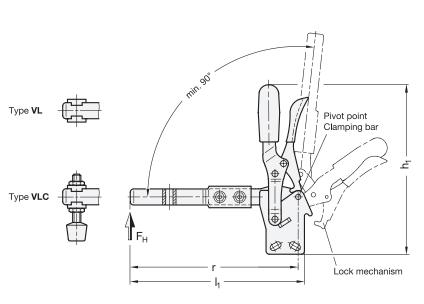


2

Type


VL Clamping arm extended, with slotted hole and with two flanged washers

VLC Clamping arm extended, with slotted hole, two flanged washers and clamping screw GN 708.1

Operating principle









| Size | F _H in N Holding capacity | a≈ | b ₁ | b ₂ | b ₃ | b ₄ | d ₁ | d ₂ ≈ | h₁ ≈ | h ₂ | h ₃ | h ₄ | h ₅ max. |
|------|--|------|----------------|----------------|----------------|----------------|----------------|------------------|------|----------------|----------------|----------------|----------------------------|
| 130 | 500 | 67,5 | 35 | 10 | 5 | 6,3 | M 6 | 5,5 | 156 | 41,5 | 16 | 25,5 | 25 |
| 230 | 1000 | 71,5 | 43 | 12 | 6 | 8,2 | M 8 | 6,5 | 183 | 48 | 18 | 30 | 24 |

| Size | I₁ ≈ | I ₂ ≈ | I ₃ | m ₁ | m ₂ | m ₃ | m ₄ | r≈ | w Adjustable range |
|------|------|------------------|----------------|----------------|----------------|----------------|----------------|-----|---------------------------------|
| 130 | 164 | 121 | 55 | 12,5 | 19 | 6,5 | 7,5 | 158 | 17,5 |
| 230 | 198 | 145,5 | 68 | 19,5 | 19,5 | 6,5 | 6,5 | 191 | 20 |

Specification

- Steel
 - Case-hardened steel C10 zinc plated, blue passivated
 - Bearing pins tempered
 - Bearing rivets case-hardened
- All moving parts lubricated with special grease
- Hand grip
- High quality, oil resistant, red plastic
- Clamping screw GN 708.1, type A
- Steel, zinc plated
- Rubber tip 85 Shore A
- RoHS

Accessory

- Clamping screws → Page 585 ff.
- Holders for clamping screws GN 801
 - → Page 590
- Clamping arm extenders GN 801.1
 - → New products
- Clamping arm extenders GN 801.2
 - → New product

Information

GN 810.4 toggle clamps are latched in both end positions. In the clamped position, this prevents unintentional opening or opening caused by vibrations; and in the open position, it prevents self-closing of the toggle clamp, such as due to an extended clamping arm. The latching can be disabled with a single hand to allow for opening / closing.

They work according to the toggle principle: lever and clamping bar move in the same direction. In the clamped position the operating lever is in its vertical position.

Toggle clamps in the U-bar version with two flanged washers (type VL) can accommodate an application specific clamping screw. A clamping screw with neoprene rubber tip is also included for type VLC.

see also...

- General information for toggle clamps → Page 500
- Toggle clamps GN 910.1 ("Longlife") → Page 508
- Toggle clamps GN 810.3 (with horitontal mounting base, with extended clamping arm) → New products

| How to order | 1 | Size |
|------------------|---|------|
| GN 810.4-230-VLC | 2 | Form |



2