

Figure sequence **L**



Figure sequence **M**



Figure sequence **R**



Figure sequence **U**



Figure sequence **M**


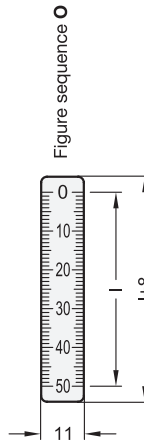


Figure sequence **O**





Rost frei Inox Stainless Steel

3 Type

- W** Figures horizontally arranged (Figure sequence L, M, R)
- S** Figures vertically arranged (Figure sequence U, M, O)

GN 711.1

Application example



2

Ruler - Length l

50	100	150	200	300	400	500	750*	1000*
----	-----	-----	-----	-----	-----	-----	------	-------

* The NI-version of this length consists of 2 parts.

Specification

- **Stainless Steel**
 - Thickness 0,6 mm
 - Scale etched
- **Plastic**
 - Thickness 0,3 mm
 - highlighted in silver
 - Scale printed
- **RoHS**

1

NI

Information

The position of linear actuator connectors can be easily read from GN 711 rulers. With GN 711.1 reference arrows, reference points can be marked on rulers or reference positions in machines.

KUS

The adhesive tape on the rear allows you to affix rulers or reference arrows on all suitable and clean surfaces after the protective film is removed. The top of the stainless steel rulers is also protected by additional protective film.

How to order (Ruler)

GN 711-NI-100-W-L

1	Material
2	Length l
3	Type
4	Figure sequence

How to order (Indicator arrow)

GN 711.1-KUS

1	Material
----------	-----------------