



Type A  
without seals



Type B  
with seals





ROSTFREI®  
Inox  
Stainless  
Steel

**3 Type**

- A Without seals
- B With seals

**4 Identification no.**

- 4 With 2 stainless steel cap nuts DIN 917

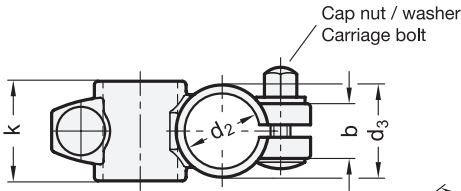

<b>1</b> $d_1$ Bore	<b>2</b> $d_2$ Bore	<b>b</b>	<b><math>d_3</math></b>	<b>k</b> Clamping length	<b><math>l_1</math></b>	<b>m</b>	<b>z</b> Screw locations	<b>Accessory</b> Recom. hand lever GN 911.3 for <b>z</b> $l_2$	
B 30	B 30	22	37	40	104	33	M 8	63	78
B 50	B 50	30	60	65	150	53	M 10	78	92

**Specification**

- Stainless Steel AISI CF-8  
Matte shot-blasted
- Carriage bolt DIN 603  
Stainless steel A2
- Cap nuts DIN 917 / washers  
Stainless steel A2
- Seals
  - Sealing disks  
Plastic (Polyacetal POM)
  - Spacer ring  
Silicon, 40 ... 60 Shore A
- *Plastic Characteristics* → Page QVX
- *Stainless Steel Characteristics* → Page QVX
- RoHS

**Accessory**

- Adjustable Hand Levers GN 911.3  
→ Page QVX

**Information**

The clamping bores of two-way connector clamps GN 132.5 are mechanically machined and designed for construction tubes GN 990 or DIN 2391, DIN 2395 and DIN 2462.

At the screw locations **z**, carriage bolts and cap nuts reduce the bore cross-section for clamping. Type B is equipped with seals at the screw locations.

For clamping without tools, the cap nuts can be replaced by adjustable hand levers GN 911.3 listed in the table as accessories.

see also...

- *Stainless Steel Construction Tubes GN 990* → Page QVX

How to order	
<b>1</b>	$d_1$
<b>2</b>	$d_2$
<b>3</b>	Type
<b>4</b>	Identification no.

**GN 132.5-B30-B30-A-4**

3.1  
3.2  
3.3  
3.4  
3.5  
3.6  
3.7  
3.8  
3.9